



TUNGSRAM 

**VEHICLE
LAMPS**

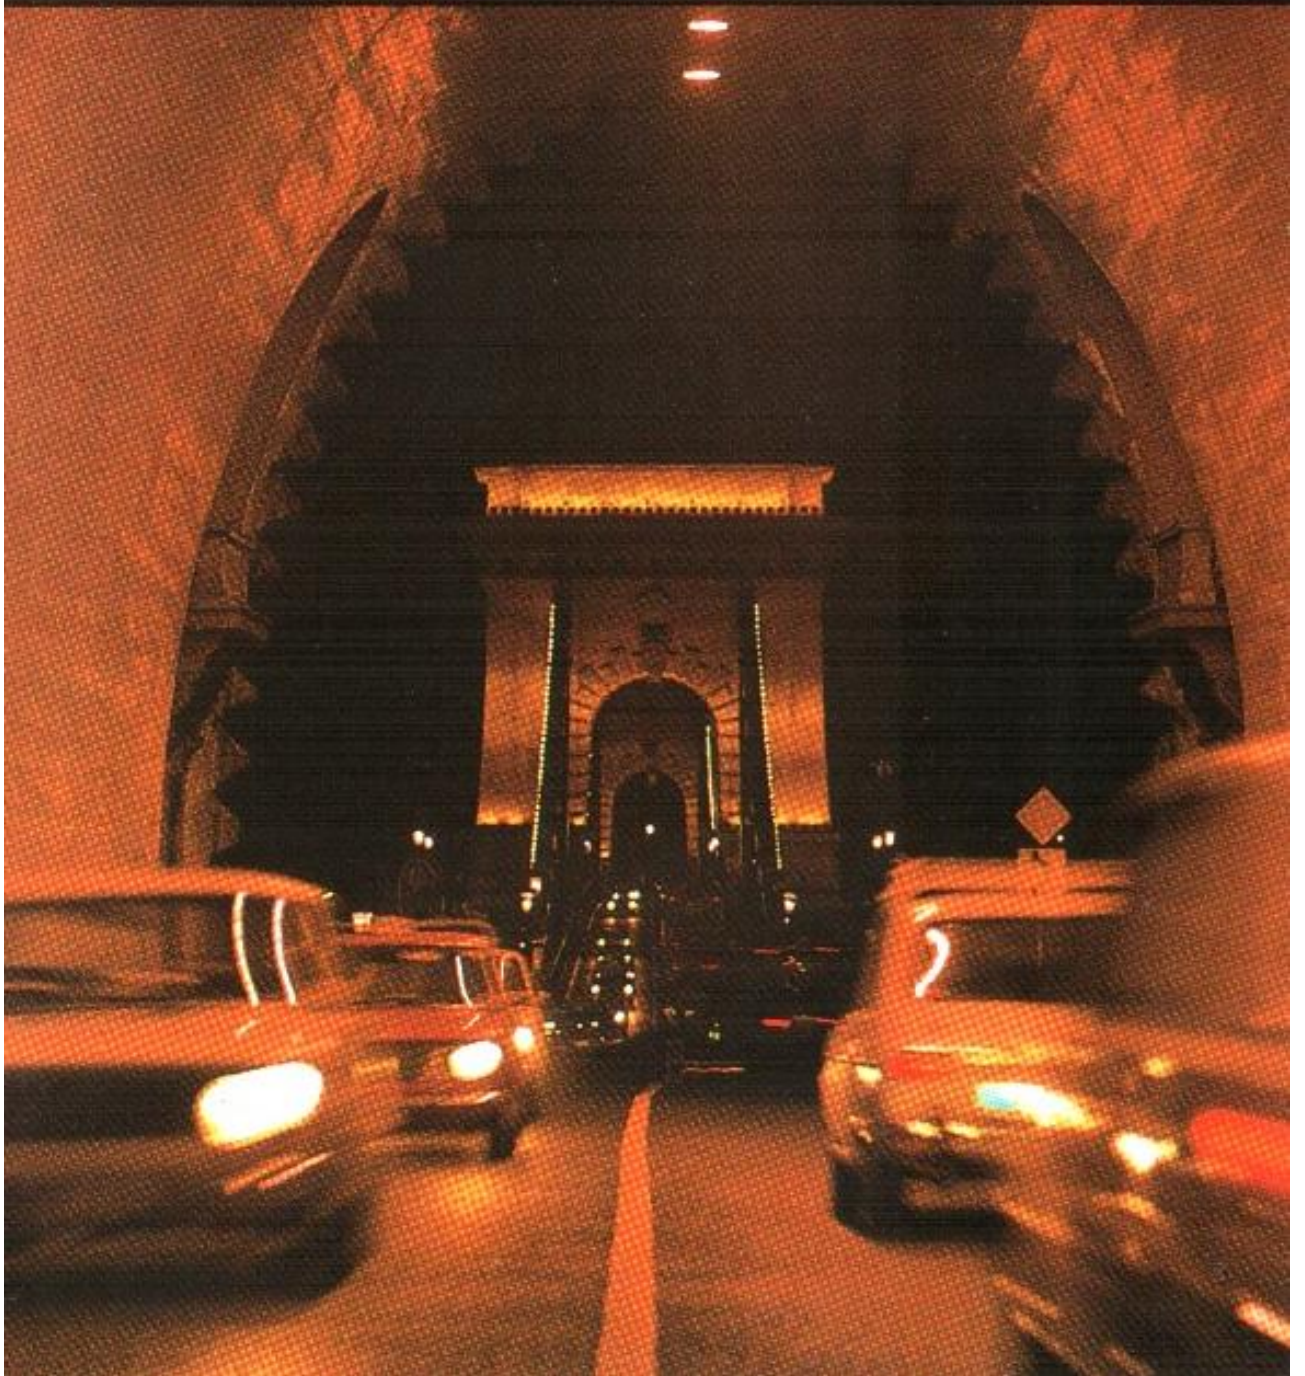

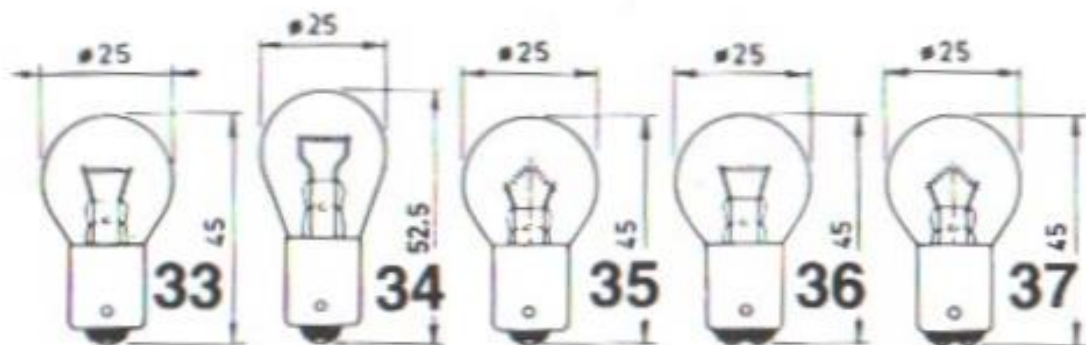

Type-No.	Volts	Watts	IEC type designation	Standard package quantity, pcs.	Fig.
----------	-------	-------	----------------------	---------------------------------	------

Stop lamps


with cap BA15s

1141	6	15	—	200	33
1055	6	18	—	200	33
1053	6	21	P25-1	200	34
1143	12	15	—	200	33
1059	12	18	—	200	33
1057	12	21	P25-1	200	34
1115	24	15	—	200	35
1117	24	18	—	200	35
1060	24	21	P25-1	200	34

Stop lamps

with cap BA15d

1140	6	15	—	200	36
1142	12	15	—	200	36
1114	24	15	—	200	37
1116	24	18	—	200	37

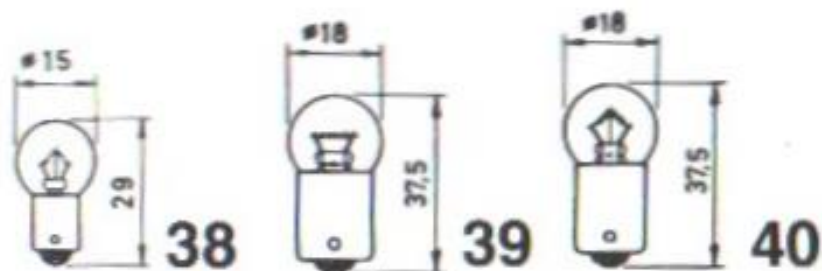

Type-No.	Volts	Watts	IEC type designation	Standard package quantity, pcs.	Fig.
----------	-------	-------	----------------------	---------------------------------	------

Ancillary lamps


with cap BA9s

2632	6	5	—	500	38
2633	12	5	—	500	38
2665	12	6	—	500	38

Ancillary lamps

with cap BA15s

2605	6	3	—	500	39
2615	6	5	R19/5	500	39
2620	6	7	—	500	39
2639	6	10	R19/10	500	39
2609	12	3	—	500	39
2619	12	5	R19/5	500	39
2621	12	7	—	500	39
2641	12	10	R19/10	500	39
2627	24	5	R19/5	500	40
2643	24	10	R19/10	500	40

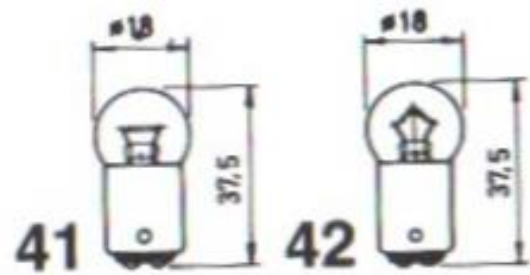

Type-No.	Volts	Watts	Standard package quantity, pcs.	Fig.
----------	-------	-------	---------------------------------	------

Ancillary lamps

with cap BA15d

2604	6	3	500	41
2614	6	5	500	41
2638	6	10	500	41
2608	12	3	500	41
2618	12	5	500	41
2640	12	10	500	41
2626	24	5	500	42




43

Indicator lamps

with wedge base W2.1 × 9.5d

Type-No.	Volts	Watts	IEC type designation	Standard package quantity, pcs.	Fig.
5303	6	3	WT10/3	500	43
5306	6	5	W5	500	43
5313	12	2	—	500	43
5304	12	3	WT10/3	500	43
5307	12	5	W5	500	43

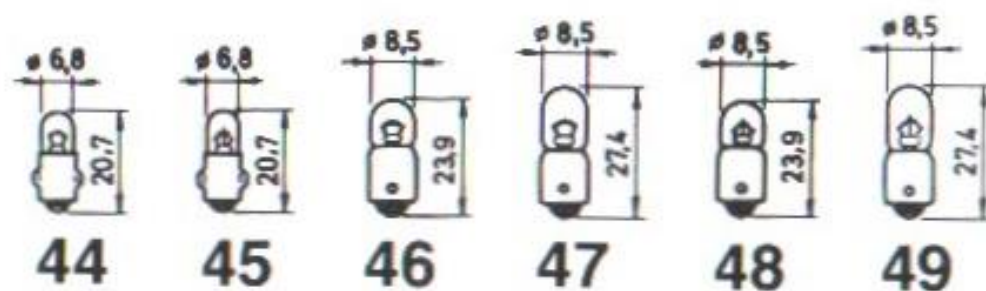

Type-No.	Volts	Watts	IEC type designation	Standard package quantity, pcs.	Fig.
----------	-------	-------	----------------------	---------------------------------	------

Indicator lamps


with cap BA7s

2694	6	0,6	—	500	44
2690	6	1,2	—	500	44
2695	12	1,2	—	500	45
2696	12	2	—	500	45
2692	24	3	—	500	45

Indicator lamps

with cap BA9s/13 × 8

2657	6	2	T8/2	500	46
2658	6	3	—	500	46
2659	6	4	T8/4	500	47
2660	12	2	T8/2	500	48
2656	12	3	—	500	48
2662	12	4	T8/4	500	49
2663	24	2	T8/2	500	48
2661	24	4	T8/4	500	49

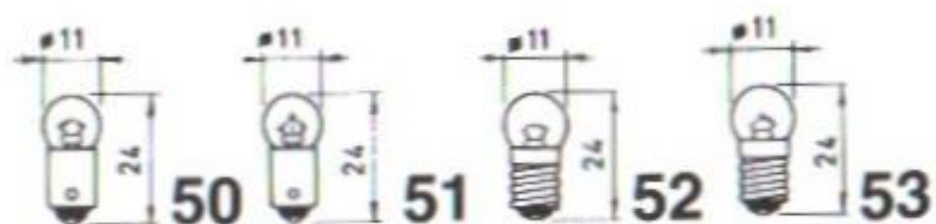

Type-No.	Volts	Watts	Standard package quantity, pcs.	Fig.
----------	-------	-------	---------------------------------	------

Indicator lamps

with cap BA9s

2669	6	2	500	50
2697	12	3	500	51
2681	24	3	500	51

Indicator lamps

with cap E10

2670	6	2	500	52
2683	12	3	500	53
2688	24	3	500	53



Type-No.	Volts	Watts	Dimensions, mm		Standard package quantity, pcs.	Fig.
			∅	length		

Bicycle and scooter headlight lamps with cap E10/13

2745 ¹	6	2,1	15,5	29	500	54
2724 ¹	6	2,4	15,5	29	500	54
2746 ¹	6	2,7	15,5	29	500	54
2747 ¹	6	3,0	15,5	29	500	54

Bicycle and scooter headlight lamps with cap EP10/14 × 11

2767 ¹	6	2,1	15,5	29	500	55
2765 ¹	6	2,4	15,5	29	500	55
2769 ¹	6	2,7	15,5	29	500	55
2768 ¹	6	3,0	15,5	29	500	55

¹for delivery with grooved bulb add letter R to type-number, e.g. 2742R



Type-No.	Volts	Watts	Dimensions, mm		Standard package quantity, pcs.	Fig.
			∅	length		

Bicycle and scooter tail lamps with cap E10/13

2748 ¹	6	0,3	11,5	24	500	56
2702 ¹	6	0,6	11,5	24	500	56
2704 ¹	6	0,9	11,5	24	500	56

Bicycle and scooter tail lamps with cap BA9s/13

2701 ¹	6	0,3	11,5	24	500	57
2703 ¹	6	0,6	11,5	24	500	57
2705 ¹	6	0,9	11,5	24	500	57

¹ for delivery with grooved bulb add letter R to type-number, e.g. 2748R