



Pin-Belegung / Pin Assignment

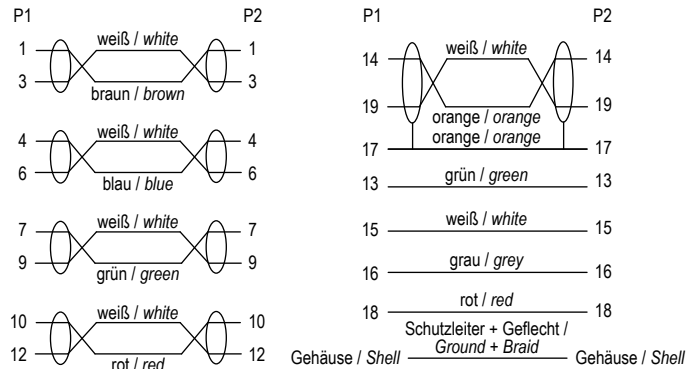

Aderquerschnitt / Wire cross section

5 Signalleitungen / 5 *Signal lines*



- Leiter der Signalleitung / *Signal line conductor*: 30 AWG (1/0.254CCS)
- Isolierung der Signalleitung / *Signal line insulation*: FO-PE
- Erdung / *Ground wire*: 30 AWG (1/0.254CCS)
- Al. Mylar / *Al. Mylar*: *5P
- Elektronen-Leiter / *Electron conductor*: 30 AWG (1/0.254CCS)
- Elektronen-Isolierung / *Electron insulation*: HD-PE*4C
- Al. Mylar (einseitige Aluminium folie + transparentes Mylar) / *Al. Mylar (single-sided aluminium foil + transparent Mylar)*
- Erdung / *Drain wire*: 30 AWG (1/0.254CCS)
- Mantel AD / *Jacket OD*: 5.5 ± 0.2 mm PVC

Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)	Übertragungsrate / Transmission rate	Kontaktwiderstand / Contact resistance
60619	HDMI 2.0 Kabel 0050 0,5m (15+1) STD sw LC	500 ± 15 mm	max. 18 Gbit/s	5 Ω max.
60620	HDMI 2.0 Kabel 0100 1,0m (15+1) STD sw LC	1000 ± 20 mm	max. 18 Gbit/s	5 Ω max.
60621	HDMI 2.0 Kabel 0150 1,5m (15+1) STD sw LC	1500 ± 30 mm	max. 18 Gbit/s	5 Ω max.
60622	HDMI 2.0 Kabel 0200 2,0m (15+1) STD sw LC	2000 ± 30 mm	max. 18 Gbit/s	5 Ω max.
60623	HDMI 2.0 Kabel 0300 3,0m (15+1) STD sw LC	3000 ± 50 mm	max. 18 Gbit/s	10 Ω max.
60624	HDMI 2.0 Kabel 0500 5,0m (15+1) STD sw LC	5000 ± 100 mm	max. 18 Gbit/s	10 Ω max.
60625	HDMI 2.0 Kabel 0750 7,5m (15+1) STD sw LC	7500 ± 200 mm	max. 10.2 Gbit/s	10 Ω max.
60626	HDMI 2.0 Kabel 1000 10,0m (15+1) STD sw LC	10000 ± 200 mm	max. 10.2 Gbit/s	20 Ω max.

High Speed HDMI™-Kabel mit Ethernet

- hochauflösende Signalübertragung mit bis zu 4K @ 60 Hz (abwärtskompatibel)
- vergoldete HDMI™-Steckverbinder
- integrierter Ethernet-Kanal spart zusätzliche Netzwerk- oder Audiokabel

Anschlüsse: 2x HDMI™-Stecker (Typ A)
 Kabeltyp: Rundkabel
 AWG: 30
 Max. Auflösung: 4K Ultra HD 2160p (60 Hz)
 Isolationswiderstand: 300 V $\overline{\text{---}}$, 10 M Ω min.
 Unterstützte Standards: HDR (High Dynamic Range),
 HDMI™ Ethernet Channel (HEC),
 4K 3D, HDCP 2.2, 21:9 Cinemascope,
 Consumer Electronics Control (CEC),
 Audio Return Channel (ARC),
 Audio (1536 kHz), Deep Color (36 Bit),
 x.v.Colour (xvYCC)

High Speed HDMI™ cable with Ethernet

- high-resolution signal transmission with up to 4K @ 60 Hz (downward compatible)
- gold-plated HDMI™ connectors
- integrated Ethernet channel saves additional network or audio cables

Connections:	2x HDMI™ plug (Type A)
Cable type:	round cable
AWG:	30
Max. resolution:	4K Ultra HD 2160p (60 Hz)
Insulation resistance:	300 V —, 10 MΩ min.
Supported standards:	HDR (High Dynamic Range), HDMI™ Ethernet Channel (HEC), 4K 3D, HDCP 2.2, 21:9 Cinemascope, Consumer Electronics Control (CEC), Audio Return Channel (ARC), Audio (1536 kHz), Deep Color (36 Bit), x.v.Colour (xvYCC)



Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 13.05.2022	ir	HDMI 2.0 Kabel XXXX Xm (15+1)  STD sw LC Zeichnungs-Nr.:	1/1
		gepr.: 13.05.2022	aw		
		Norm:			von
		Änderungen vorbehalten / <i>Subject to change</i>			