



# .100" (2,54 mm) Round Conductor Flat Cable

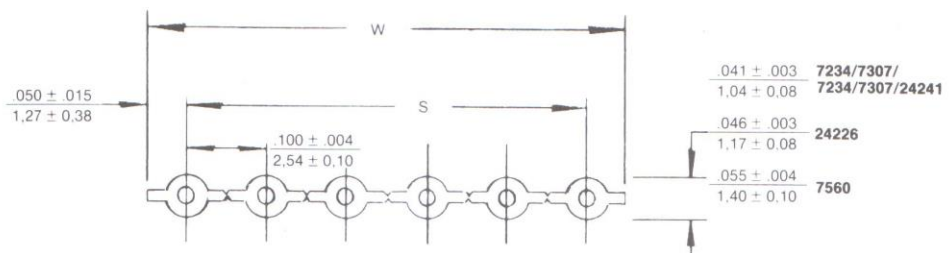

- 7234** 26 AWG (1 x 26) Solid, Tinned
- 7307** 28 AWG (7 x 36) Stranded, Tinned
- 7560** 22 AWG (7 x 30) Stranded, Tinned
- 24241** 26 AWG (7 x 34) Stranded, Tinned
- 24226** 24 AWG (7 x 32) Stranded, Tinned

- Gray PVC insulation
- Sizes up to 36 circuits
- U.L. temperature rating -20°C to 105°C
- U.L. voltage rating 300 V. max.
- U.L. flammability rating VW-1
- U.L. Style No. 2651
- U.L. recognized (File #E61522)
- CSA certification upon request

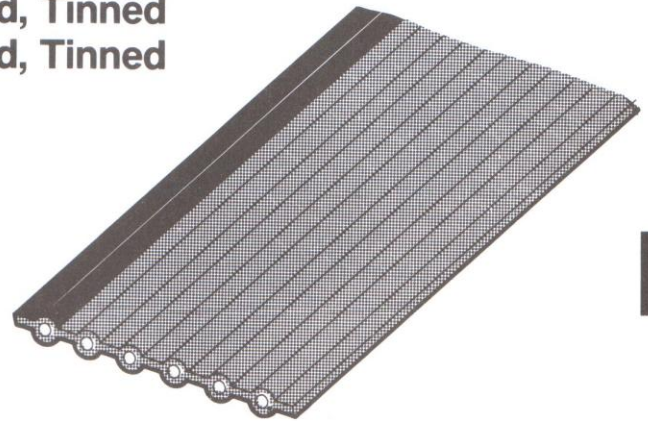

## Dimensions

Ckts.	Dim. S	Dim. W (Ref.)	Ckts.	Dim. S	Dim. W (Ref.)	Ckts.	Dim. S	Dim. W (Ref.)	Ckts.	Dim. S	Dim. W (Ref.)	Ckts.	Dim. S	Dim. W (Ref.)
2	.100 ± .004 2,54 ± 0,10	.200 5,08	9	.800 ± .013 20,32 ± 0,33	.900 22,86	16	1.500 ± .013 38,10 ± 0,33	1.600 40,64	23	2.200 ± .013 55,88 ± 0,33	2.300 58,42	30	2.900 ± .013 73,66 ± 0,33	3.000 76,20
3	.200 ± .008 5,08 ± 0,20	.300 7,62	10	.900 ± .013 22,86 ± 0,33	1.000 25,40	17	1.600 ± .013 40,64 ± 0,33	1.700 43,18	24	2.300 ± .013 58,42 ± 0,33	2.400 60,96	31	3.000 ± .013 76,20 ± 0,33	3.100 78,74
4	.300 ± .012 7,62 ± 0,30	.400 10,16	11	1.000 ± .013 25,40 ± 0,33	1.100 27,94	18	1.700 ± .013 43,18 ± 0,33	1.800 45,72	25	2.400 ± .013 60,96 ± 0,33	2.500 63,50	32	3.100 ± .013 78,74 ± 0,33	3.200 81,28
5	.400 ± .013 10,16 ± 0,33	.500 12,70	12	1.100 ± .013 27,94 ± 0,33	1.200 30,48	19	1.800 ± .013 45,72 ± 0,33	1.900 48,26	26	2.500 ± .013 63,50 ± 0,33	2.600 66,04	33	3.200 ± .013 81,28 ± 0,33	3.300 83,82
6	.500 ± .013 12,70 ± 0,33	.600 15,24	13	1.200 ± .013 30,48 ± 0,33	1.300 33,02	20	1.900 ± .013 48,26 ± 0,33	2.000 50,80	27	2.600 ± .013 66,04 ± 0,33	2.700 68,58	34	3.300 ± .013 83,82 ± 0,33	3.400 86,36
7	.600 ± .013 15,24 ± 0,33	.700 17,78	14	1.300 ± .013 33,02 ± 0,33	1.400 35,56	21	2.000 ± .013 50,80 ± 0,33	2.100 53,34	28	2.700 ± .013 68,58 ± 0,33	2.800 71,12	35	3.400 ± .013 86,36 ± 0,33	3.500 88,90
8	.700 ± .013 17,78 ± 0,33	.800 20,32	15	1.400 ± .013 35,56 ± 0,33	1.500 38,10	22	2.100 ± .013 53,34 ± 0,33	2.200 55,88	29	2.800 ± .013 71,12 ± 0,33	2.900 73,66	36	3.500 ± .013 88,90 ± 0,33	3.600 91,44

See Page 13D for Electrical Specifications.

## Ordering Information

For Cable Series Number	Reel Size	Use Order Number	For Cable Series Number	Reel Size	Use Order Number
7234-XX	100 ft. reel	• 82-26-57XX	7560-XX	300 ft. reel	• 82-22-62XX
7234-XX	300 ft. reel	• 82-26-59XX	24241-XX	100 ft. reel	• 82-26-56XX
7307-XX	100 ft. reel	• 82-28-58XX	24241-XX	300 ft. reel	• 82-26-53XX
7307-XX	300 ft. reel	• 82-28-6XX2	24226-XX	100 ft. reel	• 82-24-77XX
7560-XX	100 ft. reel	• 82-22-61XX	24226-XX	300 ft. reel	• 82-24-73XX

In place of "XX", indicate circuit size desired

• U.S. Standard Product, available through Molex franchised distributors.

Other reel sizes available — Contact factory