


## Explanation of part numbers

## Part number system

## ◇ Standard

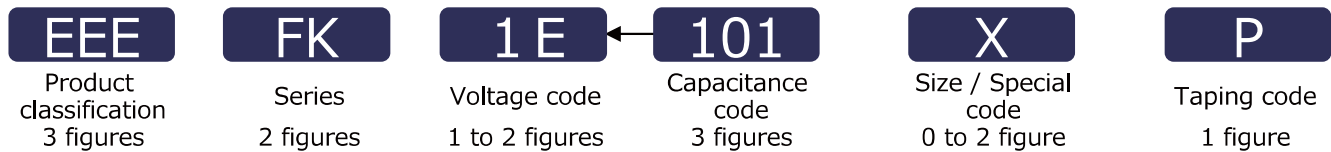

## ◇ Special 1

EEV

| Series                      | Code | Rated voltage (V) | Code    | Cap. (μF) | Code | φD × L (mm)                     | Code | φD × L (mm)      | Code |
|-----------------------------|------|-------------------|---------|-----------|------|---------------------------------|------|------------------|------|
| HA (105 °C 1000 h)          | HA   | 4                 | 0G      | 1         | 10   | 4 to x 5.4 to                   | -    | 4.5              | R    |
| HB (105 °C 2000 h)          | HB   | 6.3               | 0J*2(J) | 2.2       | 2R2  | 4 to 6.3x5.4 (Miniaturization)  | W    | 6.3 to           | P    |
|                             | HB*1 | 10                | 1A*1(A) | 3.3       | 3R3  | 4 to (High temp.reflow)         | A    | 10(x 10.2)       |      |
| HC (105 °C 3000 to 5000 h)  | HC   | 16                | 1C*2(C) | 4.7       | 4R7  | 4 to 6 (Min.,High temp. reflow) | WA   | 10(x 13.5)       | Q    |
| HD (105 °C 5000 h)          | HD   | 25                | 1E*2(E) | 6.8       | 6R8  | 4 to x 5.8 to (Miniaturization) | U    | to x 12.5        |      |
| FC (105 °C 1000 h)          | FC   | 35                | 1V*2(V) | 10        | 100  | 4 to (Min.,High temp. reflow)   | UA   | 16, 18           | M    |
| FK (105 °C 2000 to 5000 h)  | FK   | 50                | 1H*2(H) | 18        | 180  | 6.3 x 7.7                       | X    | Vibration -proof | V*3  |
| FKS (105 °C 2000 to 5000 h) | FK   | 63                | 1J      | 22        | 220  | 6.3x7.7 (High temp.reflow)      | XA   |                  |      |
| FN (105 °C 2000 h)          | FN   | 80                | 1K*2(K) | 27        | 270  | FKS series : 6.3x7.7            | XS   |                  |      |
| FT (105 °C 2000 to 5000 h)  | FT   | 100               | 2A      | 33        | 330  | S, HB series : 4 to 6.3x5.4 L   | S    |                  |      |
| FP (105 °C 2000 h)          | FP   | 160               | 2C      | 39        | 390  | EB series : 12.5 to x 16.5 L    |      |                  |      |
| TG (125 °C 1000 to 2000 h)  | TG   | 200               | 2D      | 47        | 470  | Bi-poler (Except : HB series)   | N    |                  |      |
| TK (125 °C 2000 to 3000 h)  | TK   | 250               | 2E      | 56        | 560  | FK, FT: 5000h                   | G    |                  |      |
| TP (125 °C 2000 to 3000 h)  | TP   | 350               | 2V      | 68        | 680  |                                 |      |                  |      |
| TC (125 °C 2000 to 3000 h)  | TC   | 400               | 2G      | 82        | 820  |                                 |      |                  |      |
| TCU (125 °C 3000 h)         | TC   | 450               | 2W      | 100       | 101  |                                 |      |                  |      |
| TQ (125 °C 2000 h)          | TQ   |                   |         | 120       | 121  |                                 |      |                  |      |
| EB (105 °C 3000 to 5000 h)  | EB   |                   |         | 150       | 151  |                                 |      |                  |      |
|                             |      |                   |         | 180       | 181  |                                 |      |                  |      |
|                             |      |                   |         | 220       | 221  |                                 |      |                  |      |
|                             |      |                   |         | 270       | 271  |                                 |      |                  |      |
|                             |      |                   |         | 330       | 331  |                                 |      |                  |      |
|                             |      |                   |         | 390       | 391  |                                 |      |                  |      |
|                             |      |                   |         | 470       | 471  |                                 |      |                  |      |
|                             |      |                   |         | 560       | 561  |                                 |      |                  |      |
|                             |      |                   |         | 680       | 681  |                                 |      |                  |      |
|                             |      |                   |         | 820       | 821  |                                 |      |                  |      |
|                             |      |                   |         | 1000      | 102  |                                 |      |                  |      |
|                             |      |                   |         | 1200      | 122  |                                 |      |                  |      |
|                             |      |                   |         | 1500      | 152  |                                 |      |                  |      |
|                             |      |                   |         | 1800      | 182  |                                 |      |                  |      |
|                             |      |                   |         | 2200      | 222  |                                 |      |                  |      |
|                             |      |                   |         | 3300      | 332  |                                 |      |                  |      |
|                             |      |                   |         | 4700      | 472  |                                 |      |                  |      |
|                             |      |                   |         | 6800      | 682  |                                 |      |                  |      |
|                             |      |                   |         | 7500      | 752  |                                 |      |                  |      |

\*1: Bi-poler

\*2: If part number exceeds 12 figures, voltage code is abbreviated as follows,  
0J →J, 1A→A, 1C→C, 1E→E, 1V→V, 1H→H

\*3: Vibration-proof product is available upon request.  
(φD.8 mm and larger) When requesting vibration-proof product, please put the last

\*1: Bi-poler

\*2: If part number exceeds 12 figures, voltage code is abbreviated as follows,  
0J → J, 1A → A, 1C → C, 1E → E, 1V → V, 1H → H\*3: Vibration-proof product is available upon request.  
(φD.8 mm and larger) When requesting vibration-proof product, please put the last

## ◇ Special 2

