

## Polypropylene capacitors for pulse applications with metal foil electrodes, internally series-connected for very high current ratings

- For extremely high pulse ratings because of metal foil electrodes and metal sprayed end-surface contacts.
- Self-healing construction.
- Extremely low dissipation factor (tan delta) and ESR.
- High insulation resistance.
- Low dielectric absorption.
- Preferred applications: Damping and commutation capacitors in switch mode power supplies, static frequency changes in drive and power electronics, deflection systems in monitors and TV-sets.
- Close tolerances.
- Available taped and reeled up to and including case size 15 x 26 x 31.5/PCM 27.5 mm.

### Technical Data / [General Data](#)

**Dielectric:** Polypropylene film.

**Capacitor electrodes:** Aluminium foil and double-sided metallized plastic film.

**Encapsulation:** Flame-retardent plastic case, UL 94 V-0, with epoxy resin seal. Colour: Blue. Marking: Black.

**Temperature range:** -55° C to +100 °C

**Test category:** 55/100/56 in accordance with IEC.

**Insulation resistance at +20° C:**

C ≤ 0.1 μF: ≥ 1 x 10<sup>5</sup> megohms

(mean value: 5 x 10<sup>5</sup> megohms)

C > 0.1 μF: ≥ 30000 sec (megohms x μF)

(mean value: 100000 sec)

Measuring voltage: 100 V/1 min.

**Dissipation factors at +20° C:** tan delta

at f	C ≤ 0.1 μF	0.1 μF < C ≤ 1.0 μF
1 kHz	≤ 3 x 10 <sup>-4</sup>	≤ 3 x 10 <sup>-4</sup>
10 kHz	≤ 4 x 10 <sup>-4</sup>	≤ 6 x 10 <sup>-4</sup>
100 kHz	≤ 10 x 10 <sup>-4</sup>	-

### Maximum pulse rise time:

Capacitance pF/μF	Pulse rise time V/μsec max.operation							
	400 VDC	630 VDC	1000 VDC	1250 VDC	1600 VDC	2000 VDC	4000 VDC	6000 VDC
100...220	-	-	-	-	18000	18000	-	-
330...680	-	-	-	-	15000	16000	16000	16000
1000...2200	-	-	-	13200	11000	15000	15000	15000
3300...6800	-	5500	10000	11200	9000	13000	13000	13000
0.01 ...0.022	2700	3300	5500	7700	6000	8500	8500	8500
0.033...0.068	1900	2200	4200	4900	3900	5000	5000	5000
0.1 ...0.22	1200	1500	2200	3100	3500	-	-	-

**Capacitance tolerances:** +/-20%, +/-10%, +/-5% (closer tolerances are available subject to special enquiry).





**Test voltage:** 2 Vr, 2 sec.

**Vibration:** 6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6.

**Low air density:** 1 kPa = 10 mbar in accordance with IEC 60068-2-13.

**Bump test:** 4000 bumps at 390 m/sec<sup>2</sup> in accordance with IEC 60068-2-29.

**Voltage derating:** A voltage derating factor of 1.35% per K must be applied from +85° C for DC voltages and from +75° C for AC voltages.

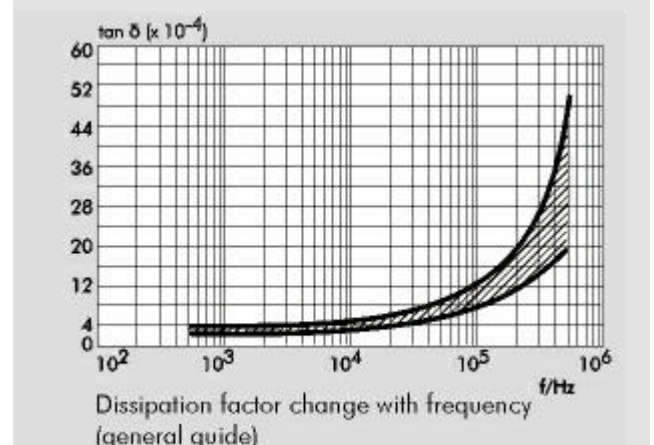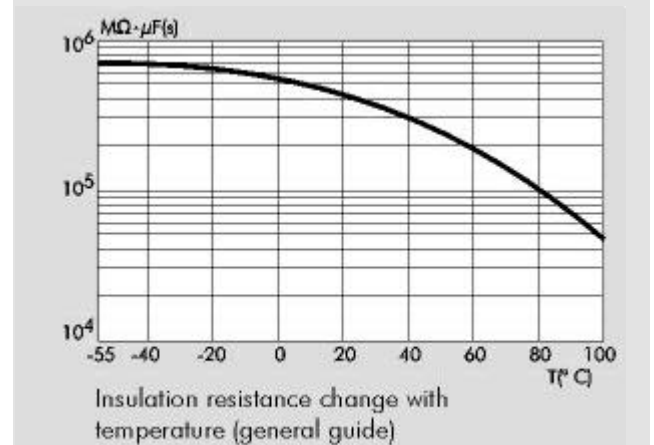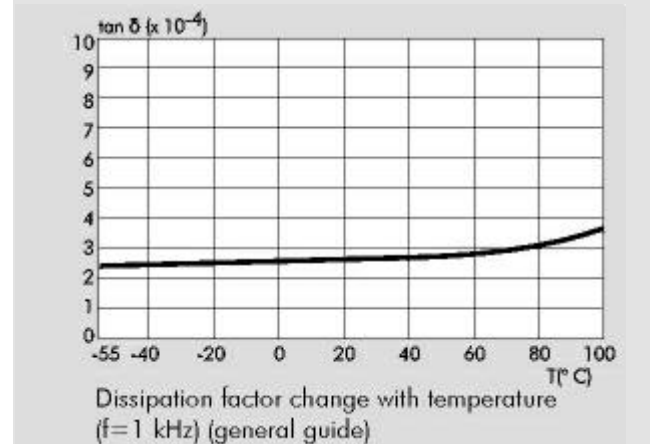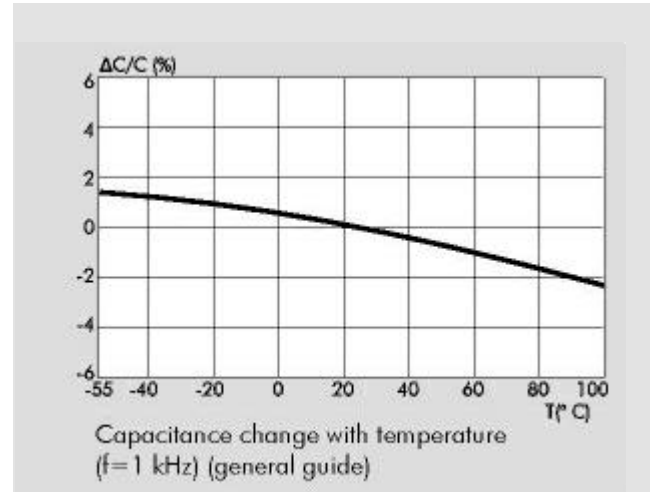



## General Data / [Technical Data](#)

Capacitance	400 VDC/250 VAC*				630 VDC/400 VAC*				1000 VDC/600 VAC*				1250 VDC/600 VAC*				1600 VDC/650 VAC*				2000 VDC/700 VAC*				4000 VDC/700 VAC*				6000 VDC/700 VAC*				Capacitance								
	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**									
100 pF																	5	11	18	15	5	11	18	15													100 pF				
150 "																	5	11	18	15	5	11	18	15													150 "				
220 "																	5	11	18	15	5	11	18	15													220 "				
330 "																	5	11	18	15	5	11	18	15													330 "				
470 "																	5	11	18	15	6	12.5	18	15	5	14	26.5	22.5	5	14	26.5	22.5	5	14	26.5	22.5	470 "				
680 "																	5	11	18	15	6	12.5	18	15	5	14	26.5	22.5	5	14	26.5	22.5	5	14	26.5	22.5	680 "				
1000pF													5	11	18	15	6	12.5	18	15*	7	14	18	15*	5	14	26.5	22.5*	5	14	26.5	22.5*	5	14	26.5	22.5	1000pF				
1500 "													5	11	18	15	7	14	18	15*	6	15	18	15*	6	15	26.5	22.5	6	15	26.5	22.5	6	15	26.5	22.5	1500 "				
2200 "													5	11	18	15	8	15	18	15*	7	16.5	26.5	22.5	7	16.5	26.5	22.5	7	16.5	26.5	22.5	7	16.5	26.5	22.5	2200 "				
3300 "									5	11	18	15	6	12.5	18	15	6	15	26.5	22.5	7	16.5	26.5	22.5	8.5	18.5	26.5	22.5	8.5	18.5	26.5	22.5	8.5	18.5	26.5	22.5	3300 "				
4700 "					5	11	18	15	6	12.5	18	15	7	14	18	15	7	16.5	26.5	22.5	8.5	18.5	26.5	22.5	10.5	20.5	26.5	22.5	10.5	20.5	26.5	22.5	10.5	20.5	26.5	22.5	4700 "				
6800 "					6	12.5	18	15	7	14	18	15	8	15	18	15*	8.5	18.5	26.5	22.5	10.5	20.5	26.5	22.5	11	21	31.5	27.5	11	21	31.5	27.5	11	21	31.5	27.5	6800 "				
0.01µF	5	11	18	15	7	14	18	15*	8	15	18	15*	7	16.5	26.5	22.5	10.5	20.5	26.5	22.5	11	21	31.5	27.5	13	24	31.5	27.5	13	24	31.5	27.5	13	24	31.5	27.5	0.01µF				
0.015 "	6	12.5	18	15	8	15	18	15*	6	15	26.5	22.5	8.5	18.5	26.5	22.5	11	21	31.5	27.5	13	24	31.5	27.5	15	26	31.5	27.5	15	26	31.5	27.5	15	26	31.5	27.5	0.015 "				
0.022 "	7	14	18	15*	6	15	26.5	22.5*	8.5	18.5	26.5	22.5	10.5	20.5	26.5	22.5	11	21	31.5	27.5	15	26	31.5	27.5*	15	26	41.5	37.5*	15	26	41.5	37.5	15	26	41.5	37.5	0.022 "				
0.033 "	5	14	26.5	22.5*	7	16.5	26.5	22.5	10.5	20.5	26.5	22.5	11	21	31.5	27.5	13	24	31.5	27.5*	13	24	41.5	37.5*	13	24	41.5	37.5	19	32	41.5	37.5	19	32	41.5	37.5	0.033 "				
0.047 "	8	15	18	15*	8.5	18.5	26.5	22.5	10.5	20.5	26.5	22.5	11	21	31.5	27.5*	9	19	31.5	27.5*	13	24	41.5	37.5*	13	24	41.5	37.5*	13	24	41.5	37.5	17	29	41.5	37.5	17	29	41.5	37.5	0.047 "
0.068 "	6	15	26.5	22.5*	10.5	20.5	26.5	22.5*	11	21	31.5	27.5	13	24	31.5	27.5*	13	24	41.5	37.5*	13	24	41.5	37.5	17	29	41.5	37.5	17	29	41.5	37.5	17	29	41.5	37.5	17	29	41.5	37.5	0.068 "
0.1 µF	7	14	18	15*	9	19	31.5	27.5*	11	21	31.5	27.5	11	22	41.5	37.5*	15	26	41.5	37.5	17	29	41.5	37.5																	0.1 µF
0.15 "	9	19	31.5	27.5*	13	24	31.5	27.5*	13	24	41.5	37.5	15	26	41.5	37.5	17	29	41.5	37.5																					0.15 "
0.22 "	11	21	31.5	27.5	13	24	41.5	37.5	15	26	41.5	37.5	17	29	41.5	37.5	19	32	41.5	37.5																					0.22 "

\*AC voltage:  $f \leq 1000 \text{ Hz}$ ;  $1.4 \times V_{rms} + VDC \leq VDC$  (rated)

\*\*PCM = Printed circuit module = lead spacing.

New voltage ranges.


Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Other values available subject to special enquiry.

\* On ordering please state the required PCM (lead spacing).  
If not specified, smaller PCM will be booked.

Dims. in mm

Rights reserved to amend design data without prior notification.

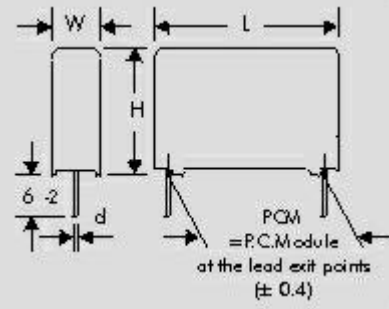

$d = 0.8 \varnothing$  if PCM 15...27.5  
 $d = 1.0 \varnothing$  if PCM 37.5

Permissible AC voltages in relation to frequency at 10° C internal temperature rise (general guide):

