

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C

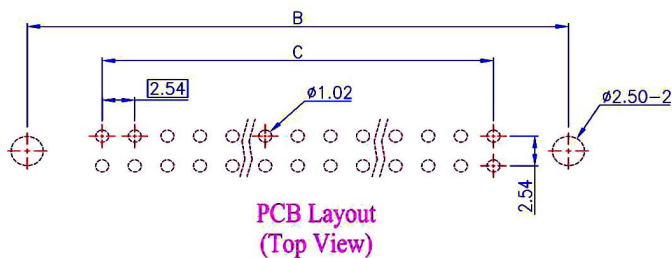
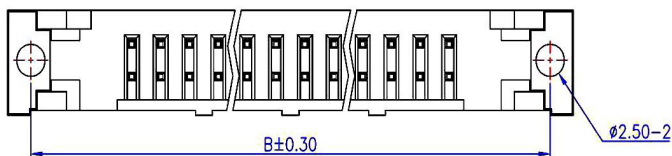
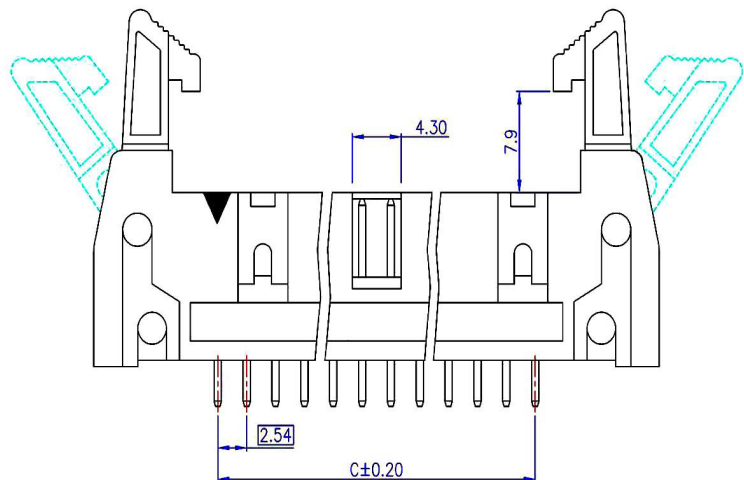
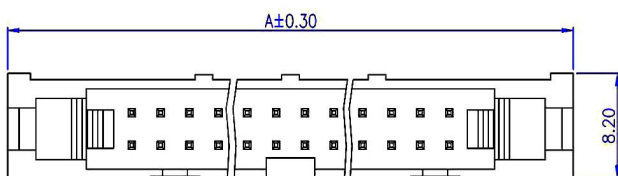
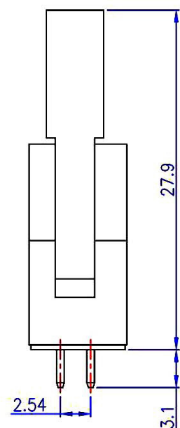
D

E

F

G

H

PCB Layout
(Top View)**Material and Finish**

1. Housing: PBT (UL94V-0), Black.
2. Terminal: Sq. 0.64mm Copper Alloy, Gold Plating.

Electrical Characteristics


1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

Dimensions

Pos.	A	B	C	Pos.	A	B	C
10	32.00	27.94	10.16	26	52.32	48.26	30.48
12	34.54	30.48	12.70	30	57.40	53.34	35.56
14	37.08	33.02	15.24	34	62.48	58.42	40.64
16	39.62	35.56	17.78	40	70.10	66.04	48.26
20	44.70	40.64	22.86	50	82.80	78.74	60.96
24	49.78	45.72	27.94				

RoHS
Compliant**T&T Connection System Co., Ltd.**APPD.
核准
BettyDWG.
製圖
BettyDATE 制表日
2012/11/01SCALE
比例 參考UNIT
單位 M MPAGE
張數 1 OF 1REV.
版次 ATOLERANCE
容許公差.0 ± 0.30
.00 ± 0.20
ANG. ± 3°SIZE
紙張尺寸 A 4REV.
版次 A

PART NAME 品名

2,54mmX2,54mm BOX HEADER
WITH LONG LOCK
STRAIGHT TYPE

PART NO.

料號 DH-XX