



KF1000 3P PCB Screw Terminal Block Connector Pitch 10MM

Specification:

Material

Pitch : 10mm

Poles: 2/3/4PIN

Screw: M4, steel, gold plated

Housing: PA66, UL94V-0

Capability

Rated voltage: 300V

Rated current: 25A

Withstand voltage: AC2000V/1min


Wire diameter: 22-12AWG

Temperature range: -40+105°C

Instantaneous temperature: +250°C

Torque: 10KG.cm

Stripping length: 6-7mm

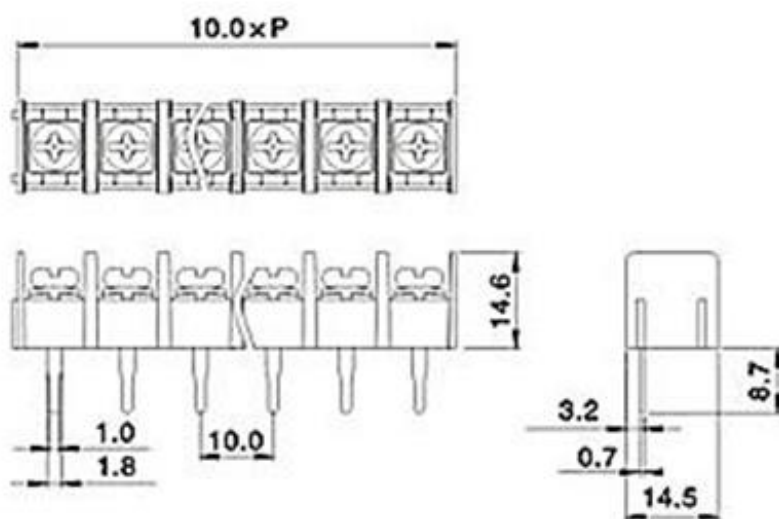

材质及电镀

间距: 10.00mm

极数: 2P、3P

螺丝: M4、钢、镀金

焊针: 黄铜、镀金

塑件: PA66.UL94V-0

性能

额定电压: 300V

额定电流: 25A

耐电压: AC2000V/1Min

使用线径: 22-12A WG

温度范围: -40°C~+105°C

瞬时温度: +250°C5秒

扭矩: 10kg.cm

剥线长度: 6-7mm