
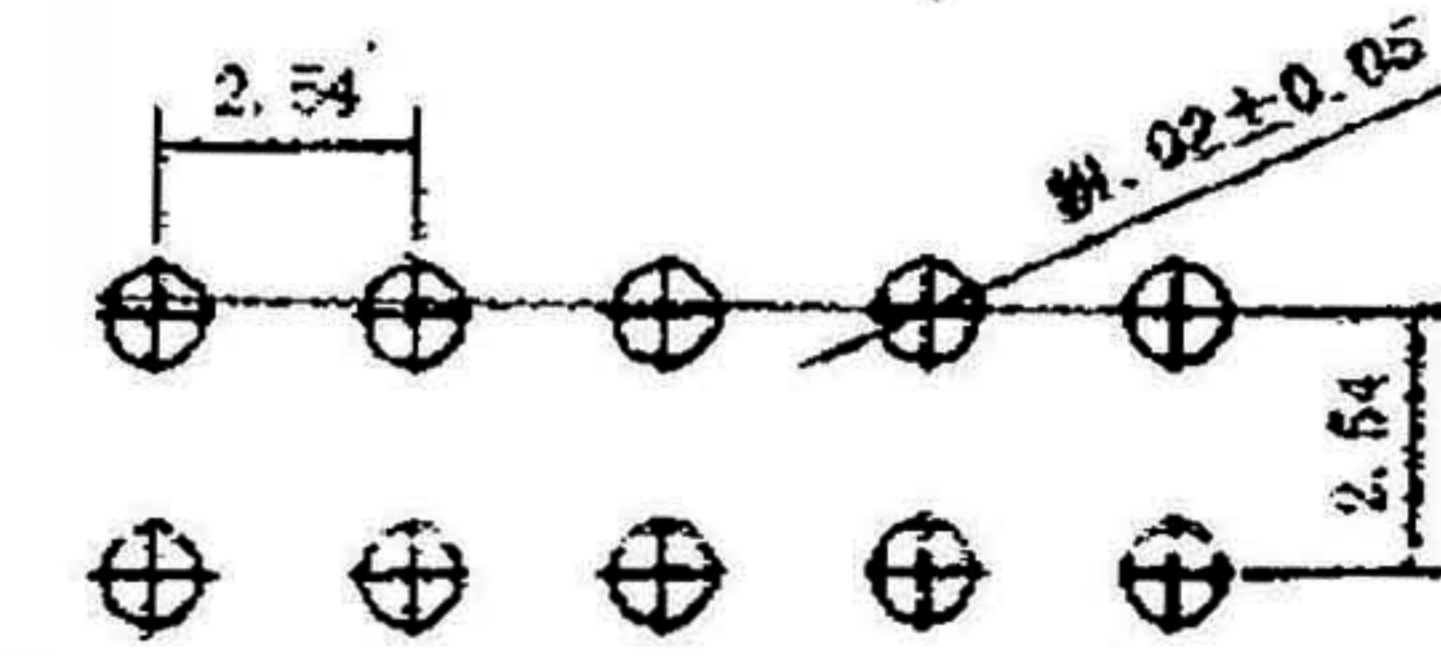
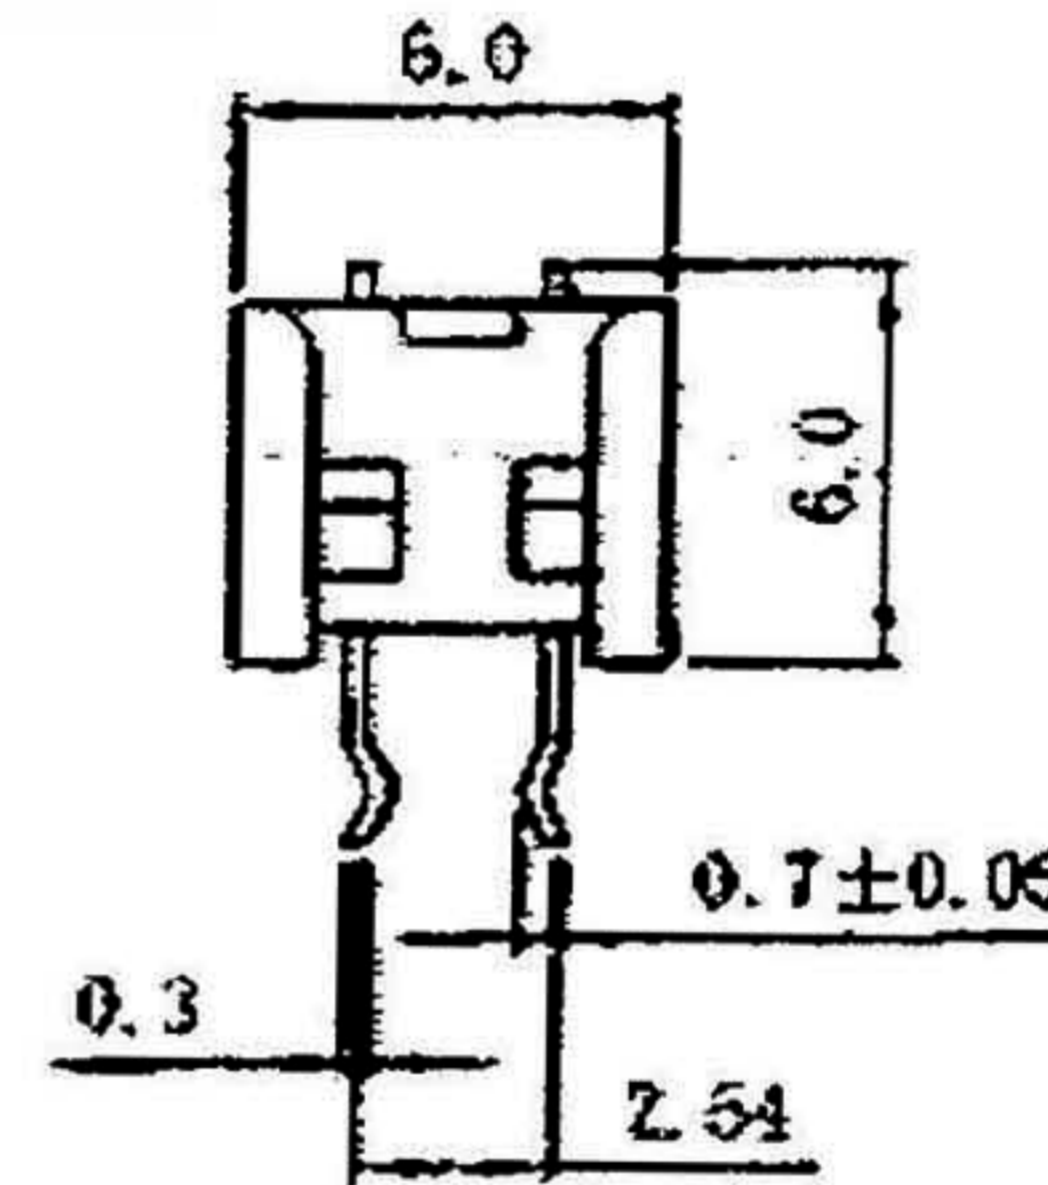
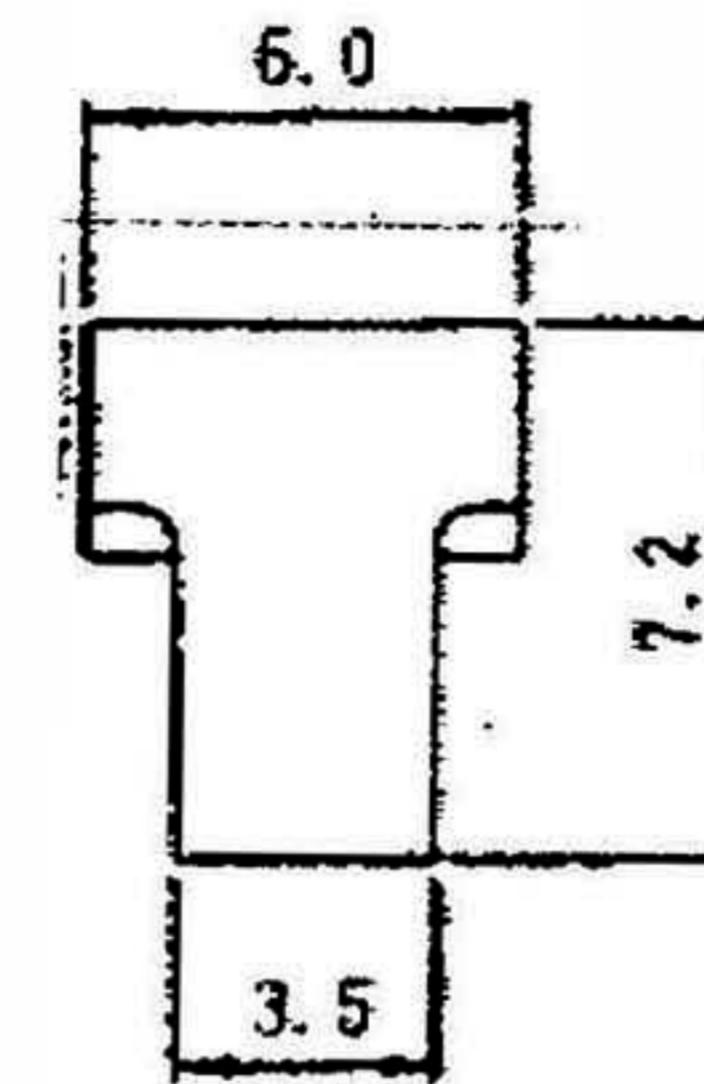
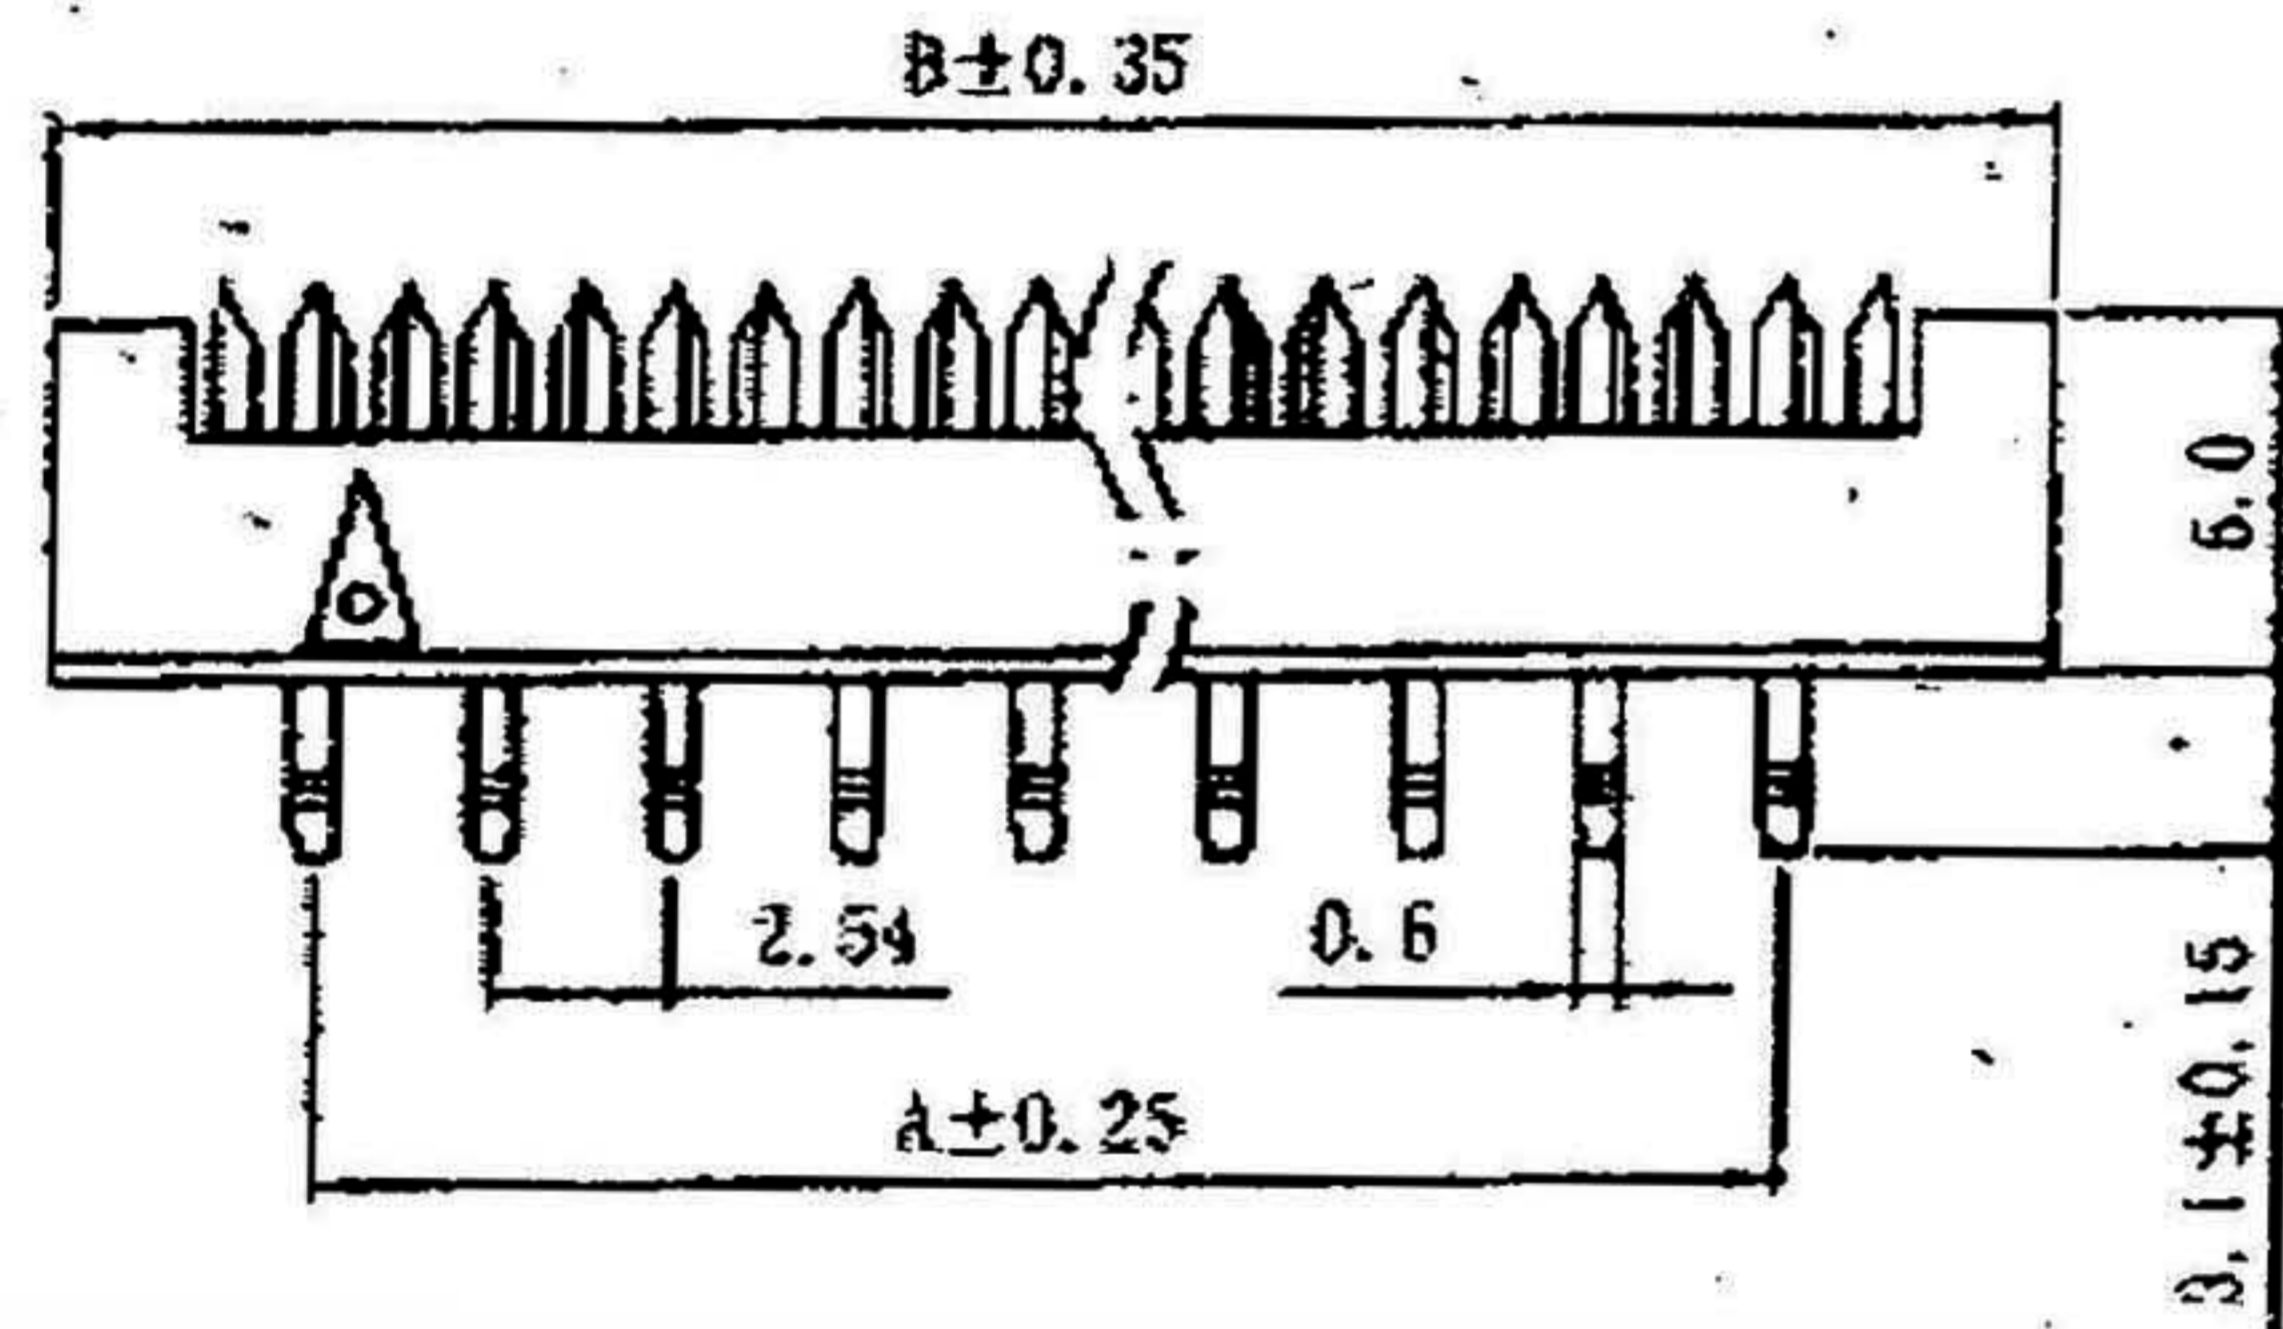


XPIN

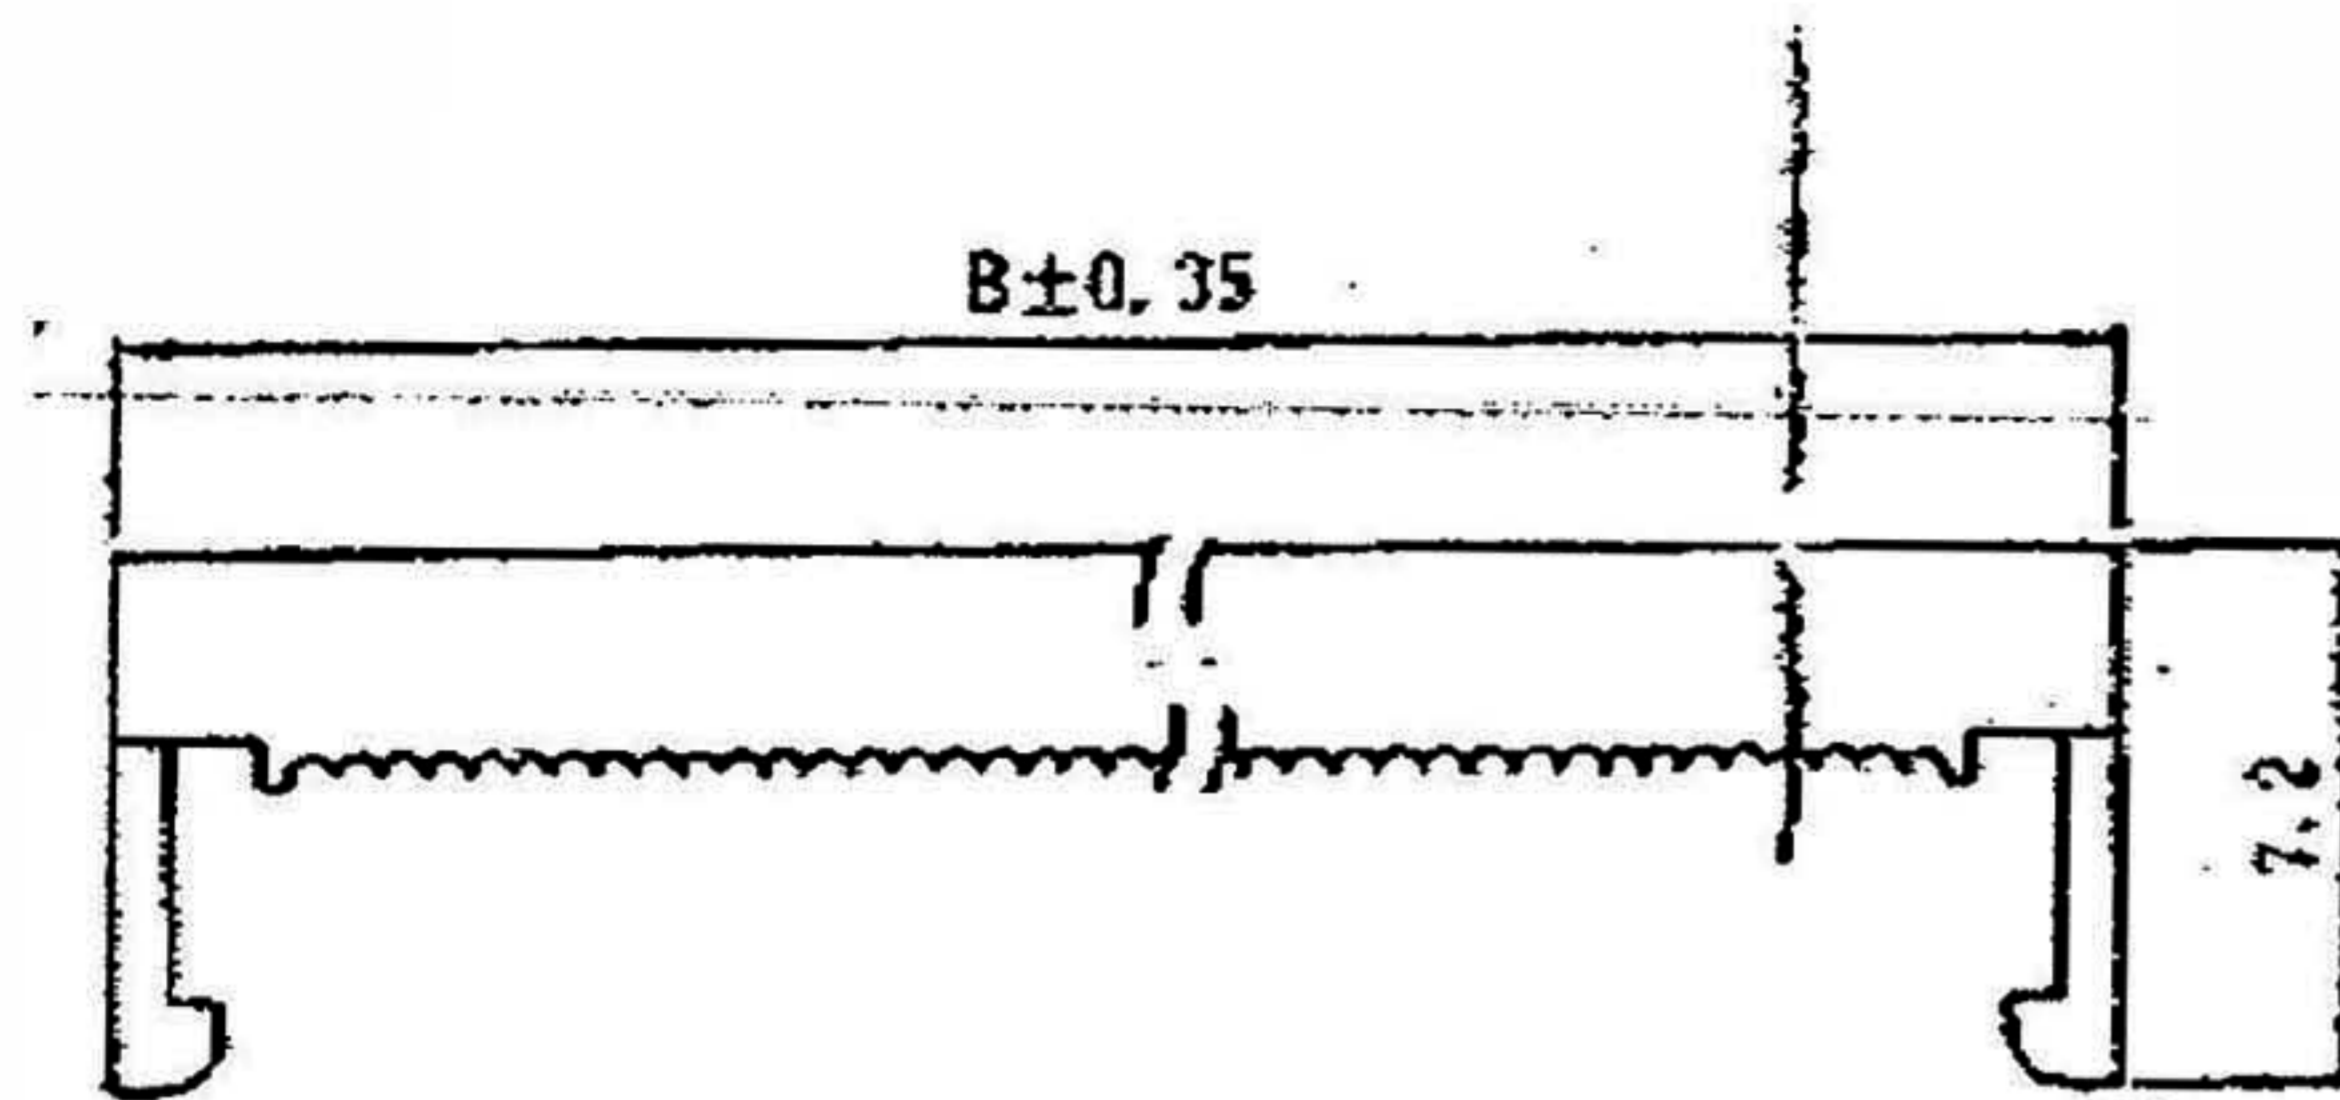

P.C.B. Hole Layout

Poles	Dimension	
	A	B
6P	5.08	13.14
8P	7.62	15.68
10P	10.16	18.22
12P	12.70	20.76
14P	15.24	23.30
16P	17.78	25.84
18P	20.32	28.38
20P	22.86	30.92
24P	27.94	36.00
26P	30.48	38.54
30P	35.56	43.62
34P	40.64	48.70
40P	48.26	56.32
50P	60.96	69.02
60P	73.66	81.72
64P	78.74	86.80

Specification

SOCKET, PITCH= 2.54mm

Current Rating: 1Amp

Withstanding Voltage: AC 500V/minute

Insulation Resistance: 1000MΩ Min. at DC 500V

Contact Resistance: 15MΩ Max.

Operating Temperature: -40°C to +105°C

Material

Insulator: PBT+30% Glass Fiber(UL94V-0)

Contact: Copper alloy

Contact plated: Gold or Tin over Nickel plated.


RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 Betty

DWG.
製圖 Yumi

DATE 制表日
2008/01/17

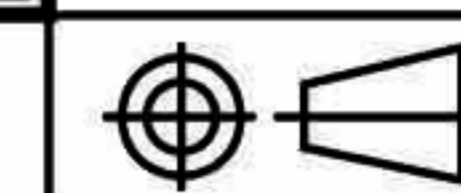

SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差
.0 ±
.00 ±
ANG. ±

SIZE.
紙張尺寸 A4

REV.
版次 A

PART NAME 品名

DIP PLUG 2.54mm X 2.54mm XXP BLACK
INSULATOR WITH KINK ROHS

TP1-xx