


长形全绝缘中间接头(TL-JTK型)

VINYL-INSULATED BUTT SPLICE TERMINAL(TYPE TL-JTK)

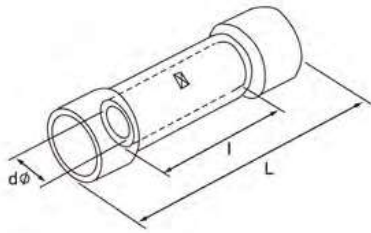

■ Material: Copper Insulating Material: PVC

ITEM NO.	Conductor section		Dimension(mm)			Imax	Color
	A.W.G	mm ²	l	d φ	L		
BV 1.25	22-16	0.5-1.5	15.0	1.7	25.0	19A	Red
BV 2	16-14	1.5-2.5	15.0	2.3	25.0	27A	Blue
BV 5.5	12-10	4-6	15.0	3.4	25.0	48A	Yellow
BV 8	#8	6-10	21.0	4.5	32.0	62A	Red
BV 14	#6	10-16	26.0	5.8	42.0	88A	Blue
BV 22	#4	16-25	29.0	7.7	50.0	115A	Yellow
BV 38	#2	35-50	32.0	9.4	55.0	160A	Red

短形全绝缘中间接头(TL-JTK型)

VINYL-INSULATED PARALLEL TERMINAL(TYPE TL-JTK)




■ Material: Copper Insulating Material: PVC

ITEM NO.	Conductor section		Dimension(mm)			Imax	Color
	A.W.G	mm ²	l	d φ	L		
PVT 1.25	22-16	0.5-1.5	8.0	1.7	16.0	19A	Red
PVT 2	16-14	1.5-2.5	8.0	2.3	16.0	27A	Blue
PVT 5.5	12-10	4-6	8.0	3.4	20.5	48A	Yellow

中间裸接头(TL型)

NON-INSULATED BUTT SPLICE TERMINAL

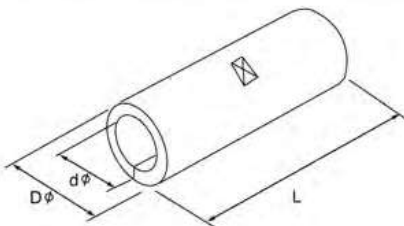

■ Material: Copper

ITEM NO.	Conductor section		Dimension(mm)		
	A.W.G	mm ²	D φ	d φ	L
BN 1.25	22-16	0.5-1.5	3.3	1.7	15.0
BN 2	16-14	1.5-2.5	4.0	2.3	15.0
BN 3.5	14-12	2.5-4	5.0	3.0	15.0
BN 5.5	12-10	4-6	5.5	3.4	15.0
BN 8	#8	10	7.1	4.5	21.0
BN 14	#6	16	9.0	5.8	26.0
BN 22	#4	25	11.4	7.7	29.0
BN 38	#2	35	13.3	9.4	32.0
BN 60	1/0	50	15.4	11.4	36.0
BN 70	2/0	70	17.5	13.3	37.0
BN 80	3/0	95	19.4	14.5	38.0
BN 100	4/0	120	22.0	16.4	38.0
BN 150	250-300MCM	150	26.5	19.5	54.0
BN 180	300-350MCM	185	28.5	21.0	57.0
BN 200	400MCM	240	32.5	24.0	63.0
BN 325	500-600MCM	300	37.0	28.0	72.0