


公预绝缘端头

VINYL-INSULATED MALE DISCONNECTORS

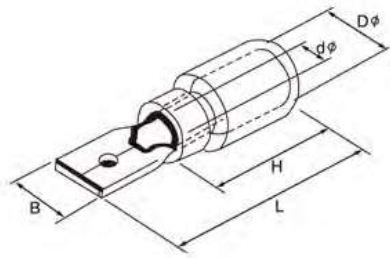

■ Conductor section: 0.5~1.5mm²(A.W.G22~16) 1max=10A Material: Brass

ITEM NO.	Nema Tab (mm)	Thickness of material	Dimension(mm)					Color
			B	Dφ	dφ	L	H	
MDD 1.25-110(5)	0.5 × 2.8	0.5	2.8	4.3	1.7	17.7	10.6	Red
MDD 1.25-110(8)	0.8 × 2.8	0.8	2.8	4.3	1.7	17.7	10.6	
MDD 1.25-187(5)	0.5 × 4.75	0.5	4.75	4.3	1.7	20.0	10.6	
MDD 1.25-187(8)	0.8 × 4.75	0.8	4.75	4.3	1.7	20.0	10.6	
MDD 1.25-250	0.8 × 6.35	0.4 × 2	6.35	4.3	1.7	21.6	10.6	



■ Conductor section: 1.5~2.5mm²(A.W.G16~14) 1max=15A Material: Brass

ITEM NO.	Nema Tab (mm)	Thickness of material	Dimension(mm)					Color
			B	Dφ	dφ	L	H	
MDD 2-187(5)	0.5 × 4.75	0.5	4.75	4.3	2.3	20.0	10.6	Blue
MDD 2-187(8)	0.8 × 4.75	0.8	4.75	4.3	2.3	20.0	10.6	
MDD 2-250	0.8 × 6.35	0.4 × 2	6.35	4.3	2.3	21.6	10.6	



■ Conductor section: 4~6mm²(A.W.G12~10) 1max=24A Material: Brass

ITEM NO.	Nema Tab (mm)	Thickness of material	Dimension(mm)					Color
			B	Dφ	dφ	L	H	
MDD 5.5-250	0.8 × 6.35	0.4 × 2	6.35	5.7	3.4	25.5	13.5	Yellow

CLOSE-END WIRE CONNECTOR

■ Shell material: Nylon 66,94V-2, certificated agree by UL.

Usage: Peel the coat of wire, then insert to tube, use pincers to fix them.

Feature: Nylon shell, long copper tube, easy to conduct electricity and hold wire tightly.

ITEM NO.	Nema Tab (mm)	W(mm)		D (mm)	Suitable Wires		Packing
		B	C		mm ²	AWG	
DL-Φ3	17.8	7.2	3.6	2.5	1.25	22-16	100PCS& 1000PCS
DL-Φ4	21.0	8.2	4.0	2.9	2.0	16-14	
DL-Φ5	22.5	9.0	4.8	3.9	5.5	12-10	
DL-Φ6	25.0	10.0	5.6	4.5	8.0	8	100PCS& 500PCS
DL-Φ7	24.2	11.0	6.5	5.4	10	8-6	
DL-Φ8	25.6	11.8	7.5	6.0	13	6	
DL-Φ10	29.5	13.5	9.3	7.5	16	4	100PCS

