

子弹形公预绝缘接头

VINYL-INSULATED BULLET DISCONNECTORS

■ Conductor section: 0.5~1.5mm²(A.W.G22~16) 1max=10A Material: Brass


ITEM NO.	Thickness of material	Dimension(mm)					Color
		bφ	F	Dφ	H	L	
MPD 1.25-156	0.4	4.0	10.6	1.7	10.6	21.2	Red

■ Conductor section: 1.5~2.5mm²(A.W.G16~14) 1max=15A Material: Brass

ITEM NO.	Thickness of material	Dimension(mm)					Color
		bφ	F	Dφ	H	L	
MPD 2-156	0.4	4.0	10.6	2.3	12.6	21.2	Blue
MPD 2-196	0.4	5.0	10.6	2.3	10.0	21.2	

■ Conductor section: 4~6mm²(A.W.G12~10) 1max=24A Material: Brass

ITEM NO.	Thickness of material	Dimension(mm)					Color
		bφ	F	Dφ	H	L	
MPD 5.5-195	0.4	5.0	12.0	3.4	13.5	25.5	Yellow

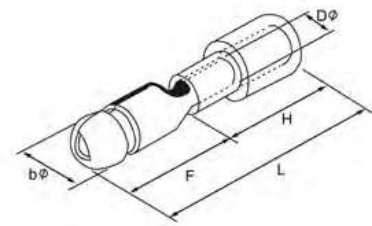

子弹形母预绝缘接头

VINYL FULLY INSULATED RECEPTACLE DISCONNECTORS

■ Conductor section: 0.5~1.5mm²(A.W.G22~16) 1max=10A Material: Brass

ITEM NO.	Thickness of material	Dimension(mm)					Color
		bφ	Bφ	Dφ	F	L	
FRD 1.25-156	0.4	4.0	6.3	1.7	13.0	24.5	Red

■ Conductor section: 1.5~2.5mm²(A.W.G16~14) 1max=15A Material: Brass

ITEM NO.	Thickness of material	Dimension(mm)					Color
		bφ	Bφ	Dφ	F	L	
FRD 2-156	0.4	4.0	6.3	2.3	14.0	24.5	Blue
FRD 2-195	0.4	5.0	7.0	2.3	14.0	25.5	

■ Conductor section: 4~6mm²(A.W.G12~10) 1max=24A Material: Brass

ITEM NO.	Thickness of material	Dimension(mm)					Color
		bφ	F	Dφ	F	L	
FRD 5.5-195	0.4	5.0	7.0	3.4	14.0	24.5	Yellow

