

ORDERING INFORMATION

Device	Temperature Range	Package
MC1430F,1431F	0°C to +70°C	Ceramic Flat
MC1430G,1431G	0°C to +70°C	Metal Can
MC1430P,1431P	0°C to +70°C	Plastic DIP
MC1530F,1531F	-55°C to +125°C	Ceramic Flat
MC1530G,1531G	-55°C to +125°C	Metal Can

OPERATIONAL AMPLIFIER

... designed for use as a summing amplifier, integrator, or amplifier with operating characteristics as a function of the external feedback components.

The MC1531 (MC1431) is provided with Darlington inputs to increase input impedance; otherwise the MC1531 (MC1431) circuit is identical with the MC1530 (MC1430) circuit.

- High Open Loop Voltage Gain – 4500 min (MC1530)
– 2500 min (MC1531)
- High Input Impedance – 10 Kiloohms min (MC1530)
– 1.0 Megohm min (MC1531)
- Low Output Impedance – 50 Ohms max
- High Slew Rate – 6.0 V/μs typ @ $A_{VS} = 10$
- High Open Loop Bandwidth – 2.0 MHz typ (MC1530)
0.4 MHz typ (MC1531)

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Power Supply Voltage MC1530, MC1531 MC1430, MC1431	V_{CC}, V_{EE} V_{CC}, V_{EE}	+9.0, -9.0 +8.0, -8.0	Vdc
Differential Input Voltage Range	V_{IDR}	± 5.0	Volts
Load Current	I_L	10	mA
Power Dissipation (Package Limitation)	P_D		
Metal Package		680	mW
Derate above $T_A = +25^\circ\text{C}$		4.6	mW/°C
Flat Package		500	mW
Derate above $T_A = +25^\circ\text{C}$		3.3	mW/°C
Dual In-Line Plastic Package MC1430, MC1431		400	mW
Derate above $+25^\circ\text{C}$		3.3	mW/°C
Operating Ambient Temperature Range MC1530, MC1531 MC1430, MC1431	T_A	-55 to +125 0 to +75	°C
Storage Temperature Range Metal and Ceramic Package Plastic Package MC1430, MC1431	T_{stg}	-65 to +175 -55 to +150	°C

CIRCUIT SCHEMATICS

FIGURE 1 – MC1530/MC1430
(STANDARD INPUT)


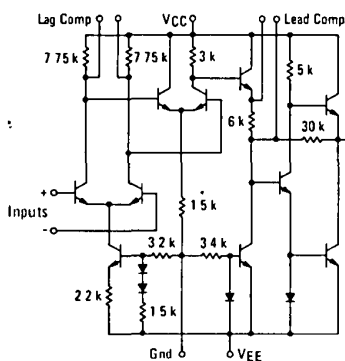


FIGURE 2 – MC1531/MC1431
(DARLINGTON INPUT)

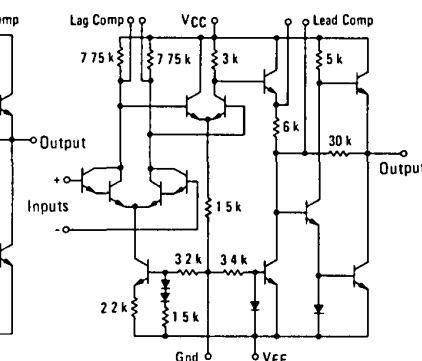



MC1430, MC1431 MC1530, MC1531

OPERATIONAL AMPLIFIERS


SILICON MONOLITHIC INTEGRATED CIRCUIT

PIN CONNECTIONS


F SUFFIX
CERAMIC PACKAGE
CASE 606
TO-91



G SUFFIX
METAL PACKAGE
CASE 603 B



P SUFFIX
PLASTIC PACKAGE
CASE 646
(MC1430P/MC1431P only)

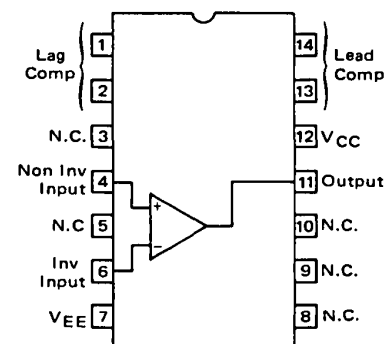

MC1430, MC1431, MC1530, MC1531

ELECTRICAL CHARACTERISTICS (V_{CC} = +6.0 Vdc, V_{EE} = -6.0 Vdc, T_A = +25°C unless otherwise noted)


Characteristic	Symbol	MC1530			MC1430			Unit
		Min	Typ	Max	Min	Typ	Max	
Input Bias Current	I _{IB}	—	3.0	10	—	5.0	15	μAdc
Input Offset Current	I _{IO}	—	0.2	2.0	—	0.4	4.0	μAdc
Input Offset Voltage T _A = +25°C T _A = T _{low} ① T _A = T _{high} ②	V _{IO}	—	1.0	5.0	—	2.0	10	mVdc
		—	—	6.0	—	—	11	
		—	—	6.0	—	—	12	
Single-Ended Input Impedance (Open-Loop, f = 30 Hz)	z _{is}	10	20	—	5.0	15	—	k Ω
Common-Mode Input Voltage Swing	V _{ICR}	± 2.0	± 2.7	—	± 2.0	± 2.5	—	V _{pk}
Equivalent Input Noise Voltage (Open-Loop, R _s = 50 ohms, BW = 5.0 MHz)	e _N	—	10	—	—	10	—	μV(rms)
Common-Mode Rejection Ratio (f = 100 Hz)	CMRR	70	75	—	65	75	—	dB
Open-Loop Voltage Gain, T _A = +25°C T _A = T _{low} to T _{high}	A _{vol}	—	—	—	3000	5000	—	V/V
		4500	5000	12,500	—	—	—	
Bandwidth (Open-Loop, -3.0 dB, no roll-off capacitance)	BW	1.0	2.0	—	1.0	2.0	—	MHz
Output Impedance (f = 100 Hz)	z _o	—	25	50	—	25	50	ohms
Output Voltage Swing (R _L = 1.0 k ohms)	V _O	± 4.5	± 5.2	—	± 4.0	± 5.0	—	V _{pk}
Power Supply Sensitivity (R _S ≤ 10 k Ω)	PSRR	—	100	—	—	100	—	μV/V
Power Supply Current	I _{CC} , I _{EE}	—	9.2	12.5	—	9.2	12.5	mAdc
DC Quiescent Power Consumption (V _O = 0)	P _C	—	110	150	—	110	150	mW

ELECTRICAL CHARACTERISTICS (V_{CC} = +6.0 Vdc, V_{EE} = -6.0 Vdc, T_A = +25°C unless otherwise noted)

Characteristic	Symbol	MC1531			MC1431			Unit
		Min	Typ	Max	Min	Typ	Max	
Input Bias Current	I _{IB}	—	0.025	0.150	—	0.1	0.3	μAdc
Input Offset Current	I _{IO}	—	0.003	0.025	—	0.01	0.1	μAdc
Input Offset Voltage T _A = +25°C T _A = T _{low} ① T _A = T _{high} ②	V _{IO}	—	3.0	10	—	5.0	15	mVdc
		—	—	18	—	—	—	
		—	—	16.5	—	—	—	
Single-Ended Input Impedance (Open-Loop, f = 30 Hz)	z _{is}	1000	2000	—	300	600	—	k Ω
Common-Mode Input Voltage Swing	V _{ICR}	± 2.0	± 2.4	—	± 2.0	± 2.2	—	V _{pk}
Equivalent Input Noise Voltage (Open-Loop, R _s = 50 ohms, BW = 5.0 MHz)	e _N	—	20	—	—	20	—	μV(rms)
Common-Mode Rejection Ratio (f = 100 Hz)	CMRR	65	65	—	60	75	—	dB
Open-Loop Voltage Gain T _A = +25°C T _A = T _{low} to T _{high}	A _{vol}	—	—	—	1500	3500	—	V/V
		2500	3500	7000	—	—	—	
Bandwidth (Open-Loop, -3.0 dB, no roll-off capacitance)	BW	—	0.4	—	—	0.4	—	MHz
Output Impedance (f = 30 Hz)	z _o	—	25	50	—	25	50	ohms
Output Voltage Swing (R _L = 1.0 k ohms)	V _O	± 4.5	± 5.2	—	± 4.0	± 5.0	—	V _{pk}
Power Supply Sensitivity (R _S ≤ 10 k Ω)	PSRR	—	100	—	—	100	—	μV/V
Power Supply Current	I _{CC} , I _{EE}	—	9.2	12.5	—	9.2	12.5	mAdc
DC Quiescent Power Consumption (V _O = 0)	P _C	—	110	150	—	110	150	mW

STEP RESPONSE, TYPICAL CHARACTERISTICS

(V_{CC} = +6.0 Vdc, V_{EE} = -6.0 Vdc, V_O = 400 mVdc, T_A = +25°C)

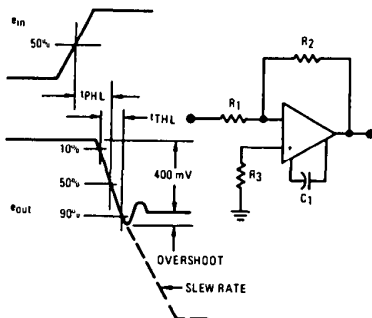


Step Response	Symbol	MC1530	MC1430	Unit
		MC1531	MC1431	
Gain = 100, 0% overshoot, R ₁ = 1.0 k ohm, R ₂ = 100 k ohms, R ₃ = 1.0 k ohm, C ₁ = 750 pF	t _{THL}	0.13	0.36	μs
	t _{PHL}	0.11	0.21	μs
	SR	33	16	V/μs
Gain = 10, 10% overshoot, R ₁ = 10 k ohms, R ₂ = 100 k ohms, R ₃ = 10 k ohms, C ₁ = 6800 pF	t _{THL}	0.34	0.30	μs
	t _{PHL}	0.25	0.28	μs
	SR	6.0	5.5	V/μs
Gain = 1.0, 5.0% overshoot, R ₁ = 10 k ohms, R ₂ = 10 k ohms, R ₃ = 5.0 k ohms, C ₁ = 33,000 pF	t _{THL}	0.28	0.37	μs
	t _{PHL}	0.16	0.17	μs
	SR	1.7	1.4	V/μs

① T_{low} 0°C for MC1430
-55°C for MC1530
+75°C for MC1430
+125°C for MC1530

T_{low} 0°C for MC1431
-55°C for MC1531
+75°C for MC1431
+125°C for MC1531

FIGURE 3 – TEST CIRCUIT

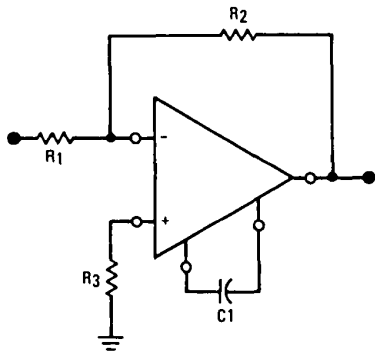

TYPICAL OUTPUT CHARACTERISTICS

($V_{CC} = +6.0 \text{ Vdc}$, $V_{EE} = -6.0 \text{ Vdc}$, $T_A = +25^\circ\text{C}$)

FIG NO	CURVE NO.	VOLTAGE GAIN	DEVICE NO	TEST CONDITIONS			
				R ₁ (k Ω)	R ₂ (k Ω)	R ₃ (Ω)	C ₁ (pF)
5	1,2	100	MC1530/MC1430, MC1531/MC1431	10	100	10 k	750
	3	10	MC1530/MC1430, MC1531/MC1431	10	100	10 k	6800
	4	1	MC1530/MC1430, MC1531/MC1431	10	10	5.0 k	33,000
6	1	100	MC1530/MC1430	10	100	10 k	750
	2	10	MC1530/MC1430	10	100	10 k	6800
	3	10	MC1530/MC1430	10	10	10 k	6800
	4	1	MC1530/MC1430	10	10	5.0 k	33,000
	5	1	MC1530/MC1430	10	10	500	33,000
7	1	100	MC1531/MC1431	10	100	10 k	750
	2	10	MC1531/MC1431	10	100	10 k	6800
	3	1	MC1531/MC1431	10	10	5.0 k	33,000
8	1	AVOL	MC1530/MC1430	0	-	0	0
	2	AVOL	MC1530/MC1430	0	-	0	750
	3	AVOL	MC1530/MC1430	0	-	0	6800
	4	AVOL	MC1530/MC1430	0	-	0	33,000
9	1	AVOL	MC1531/MC1431	0	-	0	0
	2	AVOL	MC1531/MC1431	0	-	0	750
	3	AVOL	MC1531/MC1431	0	-	0	6800
	4	AVOL	MC1531/MC1431	0	-	0	33,000

FIGURE 4 – LARGE SIGNAL SWING versus FREQUENCY

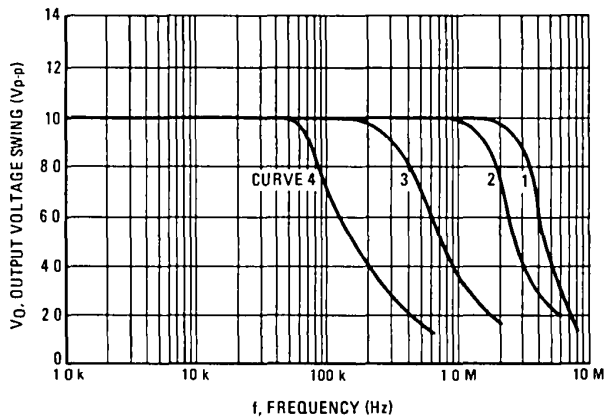


FIGURE 5 – MC1530/MC1430 VOLTAGE GAIN versus FREQUENCY

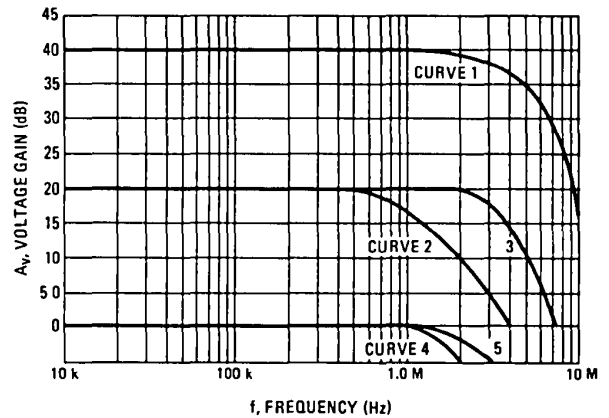


FIGURE 6 – MC1531/MC1431 VOLTAGE GAIN versus FREQUENCY


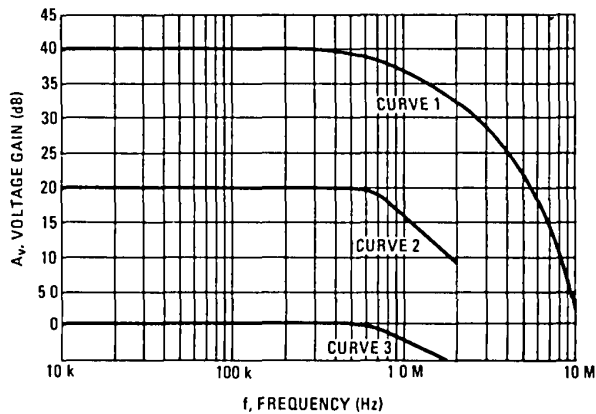


FIGURE 7 – MC1530/MC1430 OPEN LOOP VOLTAGE GAIN versus FREQUENCY

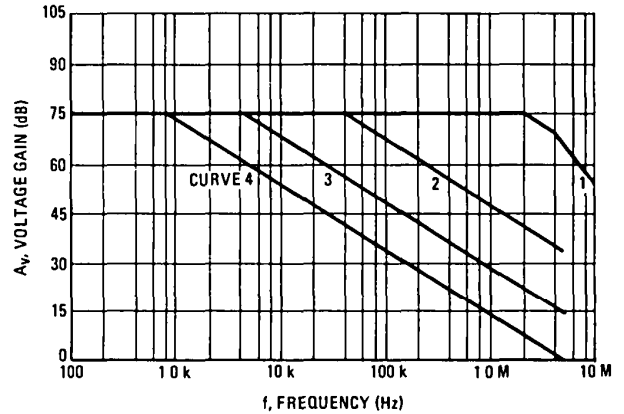

MC1430, MC1431, MC1530, MC1531

FIGURE 8 – MC1531/MC1431 OPEN LOOP VOLTAGE GAIN versus FREQUENCY

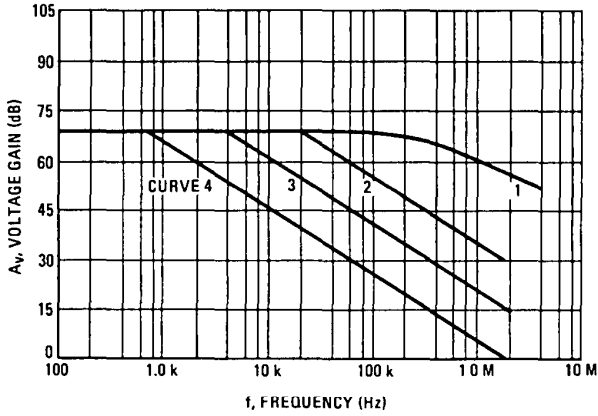


FIGURE 11 – COMMON-MODE SWING versus POWER SUPPLY VOLTAGE

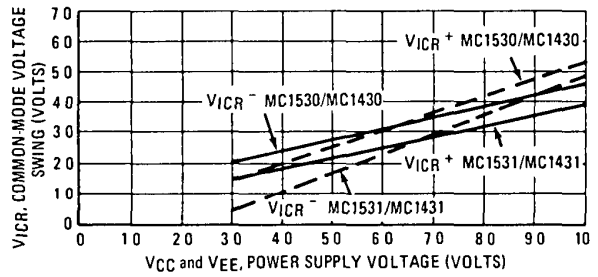


FIGURE 9 – VOLTAGE GAIN versus POWER SUPPLY VOLTAGE

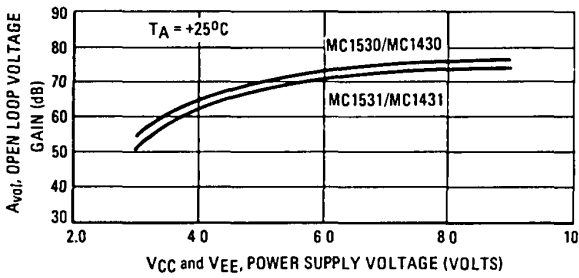


FIGURE 12 – POWER CONSUMPTION versus POWER SUPPLY VOLTAGE

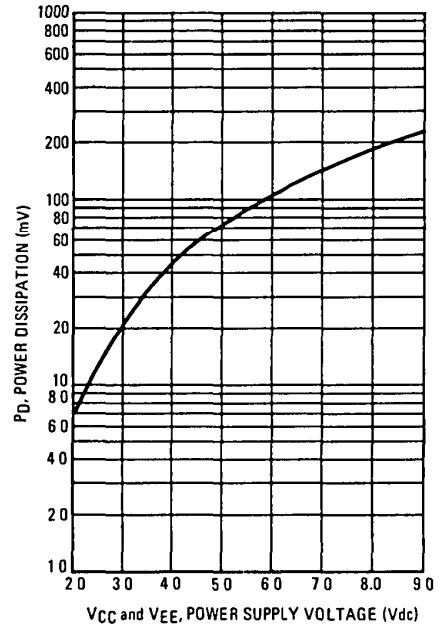


FIGURE 10 – OUTPUT VOLTAGE SWING versus LOAD RESISTANCE

