
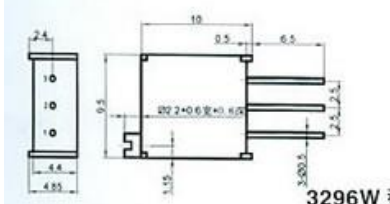



技术参数 characteristics

电器特性 Electrical Characteristics


- 标准阻值范围(Standard Resistance Range)
 - $10\ \Omega \sim 2M\ \Omega$
- 阻值允许偏差(Resistance Tolerance)
 - $\pm 5\% \pm 10\%$
- 终端电阻(Terminal Resistance)
 - $\leq 1\%R$ 或 $2\ \Omega$
- 接触电阻变化(Contact Resistance Variation)
 - $\leq 3\%R$ 或 $3\ \Omega$
- 绝缘电阻(Insulation Resistance)
 - $R_i \geq 1G\ \Omega$
- 耐电压(Withstand Voltage)
 - $101.3kPa600V, 8.5kPa360V$
- 有效电行程(Effective Electrical Travel)
 - 30 ± 2 圈(cycles)

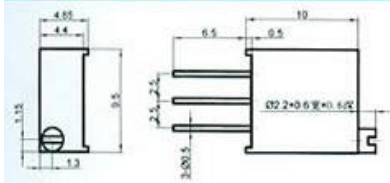


3296W 型

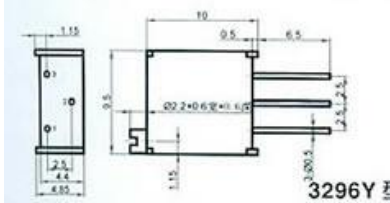


3296Y 型

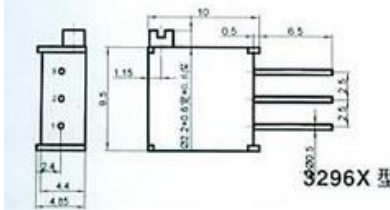


3296X 型

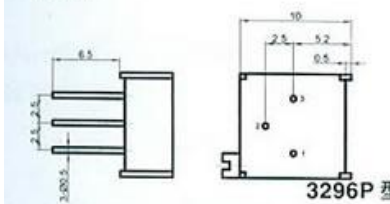

3296P 型

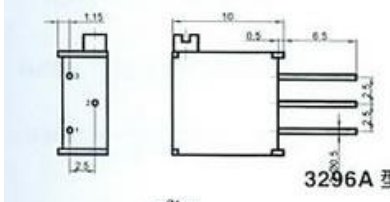

3296A 型

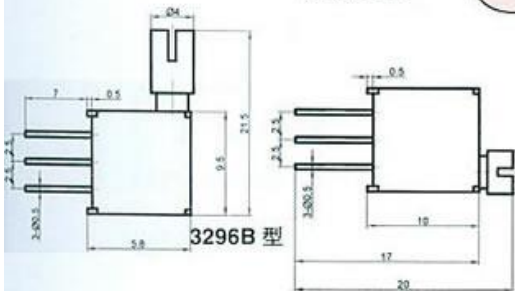

3296B 型

物理特性 Physical Characteristics

- 总机械行程(Total Mechanical Travel)
 - 30 ± 2 圈(cycles)
- 起动力矩(Starting Torque)
 - $\leq 36mN.m$
- 止档力矩(Clutch Torque)
 - $\leq 36mN.m$
- 标准包装(Standard Packaging)
 - 50 只 / 管(pcs/tube)

3296Z 型

环境特性 Environment Characteristics

- 额定功率 (最高工作电压 315V) (Rated Power)
 - $+70\ ^\circ C\ 0.75W, +125\ ^\circ C\ 0W$
- 工作温度范围(Temperature Range)
 - $-55\ ^\circ C \sim +125\ ^\circ C$
- 电阻温度系数(Temperature Coefficient)
 - $\pm 250, \pm 100ppm/^\circ C$
- 温度变化(Temperature Variation)
 - $\Delta R \leq \pm 2\%R, \Delta(Uab/Uac) \leq \pm 5\%$
- 碰撞(Collision)
 - $390m/s^2\ 4000$ 次, $\Delta R \leq \pm 3\%R$
- 震动(Vibration)
 - $10\sim 500HZ, 0.75mm$ 或 $98m/s^2, 6h$
 - $\Delta R \leq \pm 1\%R, \Delta(Uab/Uac) \leq \pm 2\%$
- 气候顺序(Climate Category)
 - $\Delta R \leq \pm 3\%R, R_i \geq 100M\ \Omega$
- 70℃电气耐久性(Electrical Endurance at 70℃)
 - $0.5W, 1000h, \Delta R \leq \pm 3\%R$
- 机械耐久性(Mechanical Endurance)
 - 200 周(cycles) $\Delta R \leq \pm 3\%R$
- 稳态湿热(Steady damp-heat)
 - $\Delta R \leq \pm 3\%R, R_i \geq \pm 100M\ \Omega$