

CRYSTAL OSCILLATORS

CXO (Clock Crystal Oscillator)



An CXO has a frequency-temperature characteristic obtained by crystal resonator and has no temperature compensation circuit. Therefore, SUNNY has designed it under optimum circuit conditions by circuit simulation analysis so that the best characteristics of the crystal resonators are obtained.

For the SCO series, greater miniaturization has been achieved by developing hybrid integrated components in its circuits. It also has a hermetic construction and is completely sealed in a dual-in-line package. The crystal oscillators typified by the SCO-010 relieve the user of washing resistance problems and are widely used as the clock generator for microcomputers.

For devices using microprocessor, personal computer, office computer, facimile, computer controlled devices etc.

Model	SCO-011	SCO-012	SCO-013
Frequency range	0.256~4 MHz	3.5~25 MHz	25~75 MHz
Frequency stability*	$\pm 25 \sim \pm 1000$ PPM		
Operating temperature range	0°C~70°C		
Storage temperature range	-55°C~+125°C		
Input voltage	+5.0V DC $\pm 10\%$		+5.0 VDC $\pm 5\%$
Input current	70 mA Max.	40 mA Max.	70 mA Max.
Output	Symmetry	$50\% \pm 10\%$ (at 1.4V)	
	Rise/Fall time	15 ns Max.	10 ns Max.
	Fanout	1 to 10 TTL gate	

*Inclusive of calibration tolerance at 25°C, operating temperature, input voltage change, load change, aging, shock and vibration.

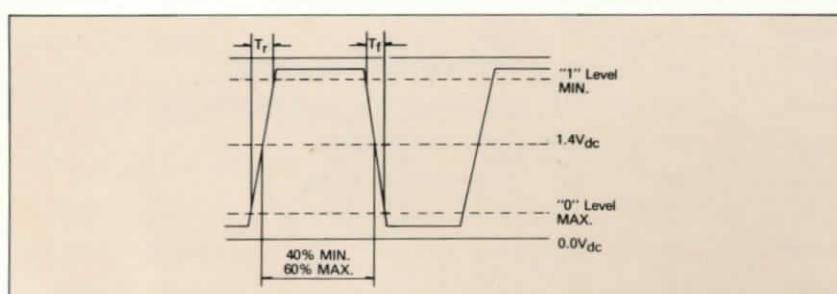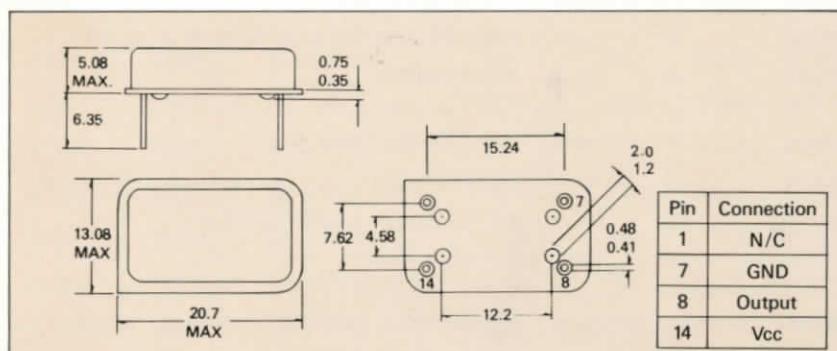

SCO-010 Series

GENERAL SPECIFICATIONS

OUTLINE AND DIMENSIONS (MM)

OUTPUT WAVE FORM

CRYSTAL OSCILLATORS

Features


- Compatible with 14-pin dual in line
- Drives C-MOS and TTL IC without analog design
- Quick start-up time
- Stable wave shape
- Hermetically sealed metal case

SCO-020 Series

Model	SCO-021	SCO-022	SCO-023	SCO-026
Frequency range	0.256~4 MHz	4~25 MHz	25~60 MHz	3~25 MHz
Frequency stability*		$\pm 25 \pm 1000$ PPM		
Frequency temperature range		0°C~70°C		
Storage temperature range		-55°C~125°C		
Input voltage		5.0V DC $\pm 10\%$		
Input current	8 mA Max.	15 mA Max.	30 mA Max.	25 mA Max.
Output	Symmetry	50% $\pm 10\%$ (at 1.4V)		50% $\pm 10\%$ (at $\frac{1}{2} V_{dd}$)
	Rise/Fall time	15ns Max.	10 ns Max.	10 ns Max.
	Fanout	1 to 10 TTL gate		1 gate 1.6 mA/gate
Remarks	TTL AND C-MOS Compatibles		C-MOS	


*Inclusive of calibration tolerance at 25°C, operating temperature, input voltage change, load change, aging, shock and vibration.

OUTLINE AND DIMENSIONS (MM)

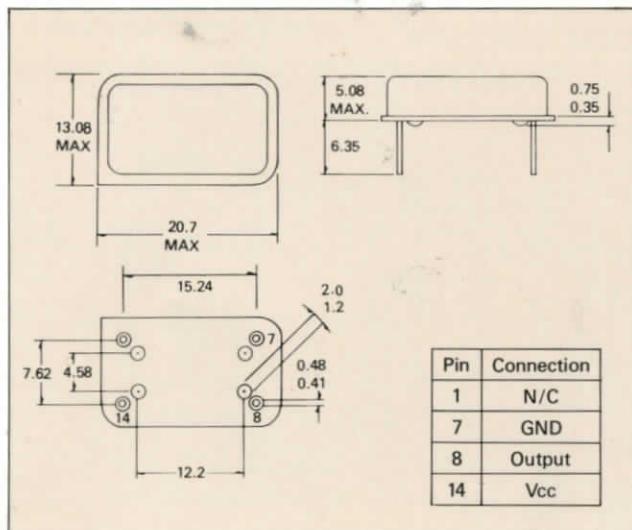


GENERAL SPECIFICATIONS

TEST CIRCUITS

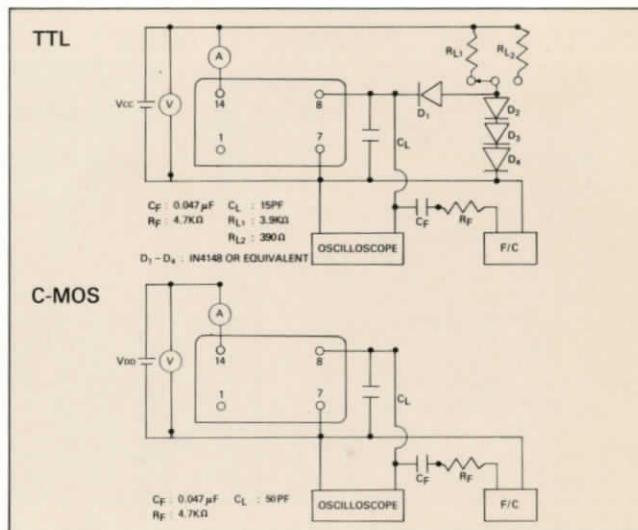


OUTPUT WAVE FORM

TTL OUTPUT

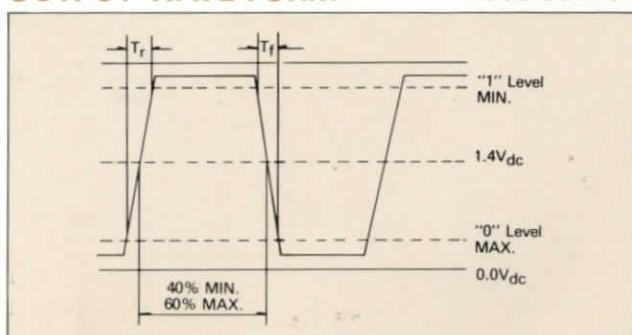

C-MOS OUTPUT

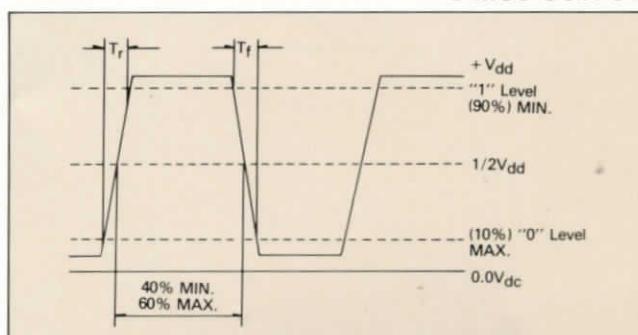

CRYSTAL OSCILLATORS

CXO (Clock Crystal Oscillator)



An CXO has a frequency-temperature characteristic obtained by crystal resonator and has no temperature compensation circuit. Therefore, SUNNY has designed it under optimum circuit conditions by circuit simulation analysis so that the best characteristics of the crystal resonators are obtained.

For the SCO series, greater miniaturization has been achieved by developing hybrid integrated components in its circuits. It also has a hermetic construction and is completely sealed in a dual-in-line package. The crystal oscillators typified by the SCO-010 relieve the user of washing resistance problems and are widely used as the clock generator for microcomputers.

For devices using microprocessor, personal computer, office computer, facimile, computer controlled devices etc.

Model	SCO-011	SCO-012	SCO-013
Frequency range	0.256~4 MHz	3.5~25 MHz	25~75 MHz
Frequency stability*	$\pm 25 \sim \pm 1000$ PPM		
Operating temperature range	0°C~70°C		
Storage temperature range	-55°C~+125°C		
Input voltage	+5.0V DC $\pm 10\%$		+5.0 VDC $\pm 5\%$
Input current	70 mA Max.	40 mA Max.	70 mA Max.
Output	Symmetry	50% $\pm 10\%$ (at 1.4V)	
	Rise/Fall time	15 ns Max.	10 ns Max.
	Fanout	1 to 10 TTL gate	

*Inclusive of calibration tolerance at 25°C, operating temperature, input voltage change, load change, aging, shock and vibration.

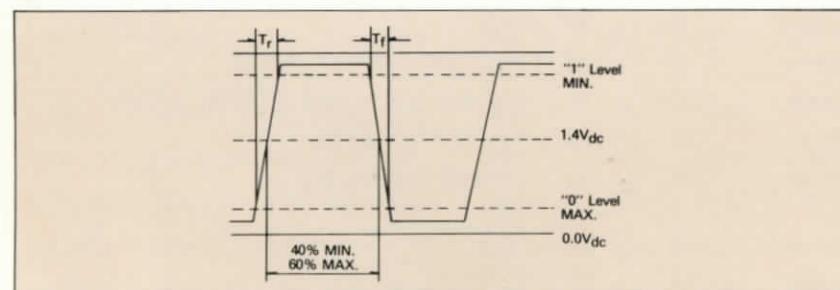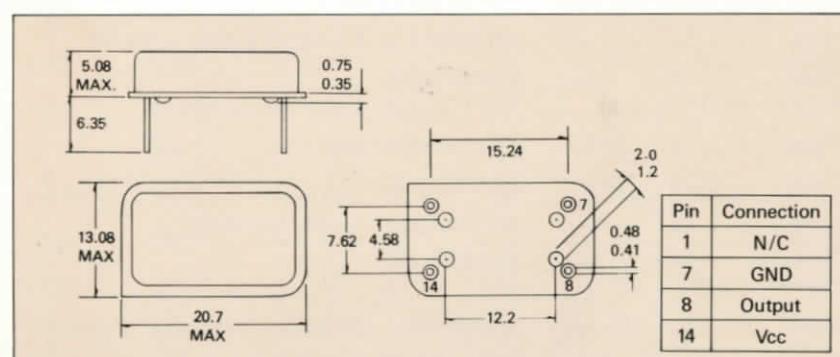

SCO-010 Series

GENERAL SPECIFICATIONS

OUTLINE AND DIMENSIONS (MM)

OUTPUT WAVE FORM

CRYSTAL OSCILLATORS

Features

- Compatible with 14-pin dual in line
- Drives C-MOS and TTL IC without analog design
- Quick start-up time
- Stable wave shape
- Hermetically sealed metal case


SCO-020 Series

GENERAL SPECIFICATIONS


Model	SCO-021	SCO-022	SCO-023	SCO-026
Frequency range	0.256~4 MHz	4~25 MHz	25~60 MHz	3~25 MHz
Frequency stability*			$\pm 25 \sim \pm 1000$ PPM	
Frequency temperature range			$0^\circ\text{C} \sim 70^\circ\text{C}$	
Storage temperature range			$-55^\circ\text{C} \sim 125^\circ\text{C}$	
Input voltage			5.0V DC $\pm 10\%$	
Input current	8 mA Max.	15 mA Max.	30 mA Max.	25 mA Max.
Output	Symmetry	$50\% \pm 10\%$ (at 1.4V)		$50\% \pm 10\%$ (at $\frac{1}{2} V_{dd}$)
	Rise/Fall time	15ns Max.	10 ns Max.	10 ns Max.
	Fanout	1 to 10 TTL gate		1 gate 1.6 mA/gate
Remarks	TTL AND C-MOS Compatibles		C-MOS	

*Inclusive of calibration tolerance at 25°C , operating temperature, input voltage change, load change, aging, shock and vibration.


OUTLINE AND DIMENSIONS (MM)

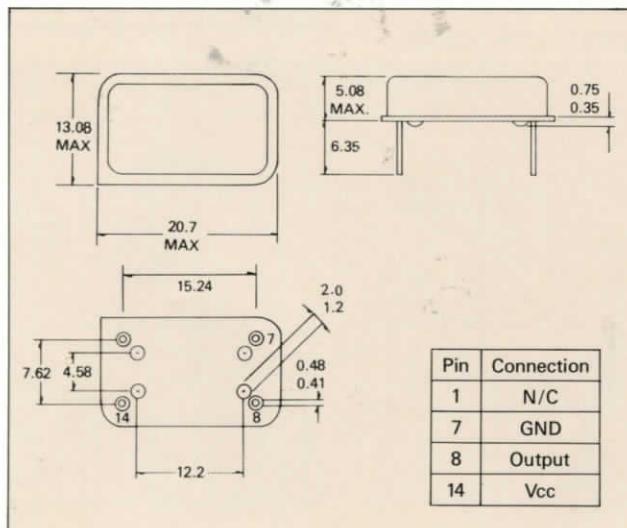


TEST CIRCUITS

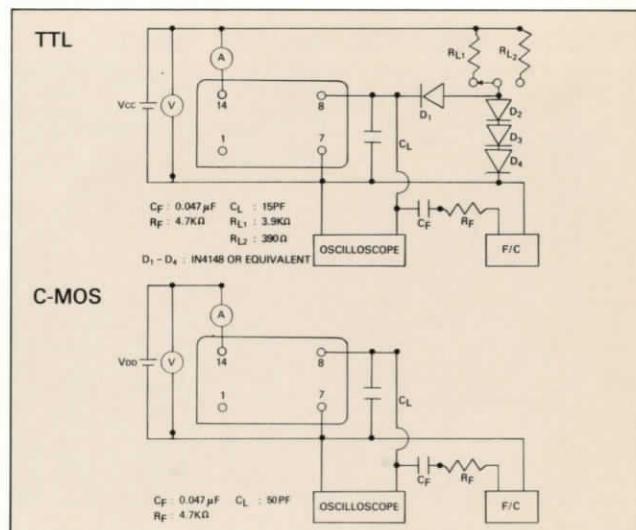

OUTPUT WAVE FORM

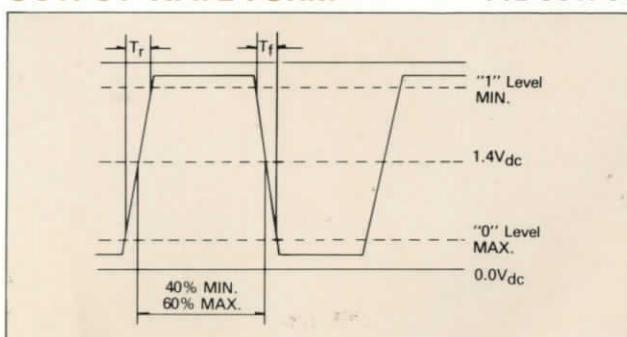

TTL OUTPUT

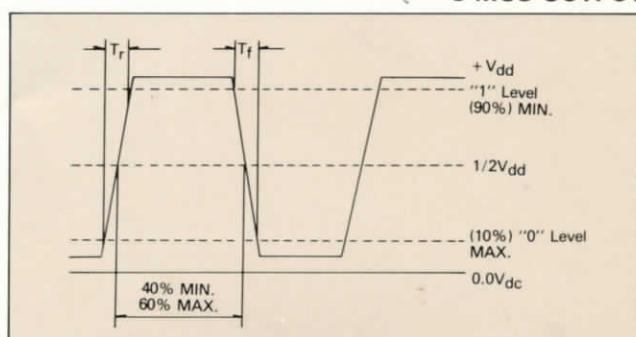

C-MOS OUTPUT

CRYSTAL OSCILLATORS

Features

- Dual (two) output frequency oscillator
- Compatible with 14-pin dual in line
- Drive C-MOS or TTL IC without analog design
- Cost and spance savings
- Hermetically sealed metal case and high reliability

SCO-030 Series


Model	SCO-031	SCO-034	SCO-037
Frequency range	0.256~75 MHz	0.256~60 MHz	
Frequency stability*		$\pm 25 \sim \pm 1000$ PPM	
Operating temperature range		0°C~70°C	
Storage temperature range		-55°C~125°C	
Input voltage	5.0V DC $\pm 5\%$	5.0V DC $\pm 10\%$	
Input current	90 mA Max.	40 mA Max.	
Output	Symmetry 50% $\pm 10\%$ (at 1.4V) Rise/Fall time 15ns Max. (0.256~4 MHz), 10ns Max. (4~25 MHz), 5ns (25~75 MHz) Fanout 1 to 10 TTL gates	50% $\pm 10\%$ (at $1/2 V_{DD}$) 1 TTL gate	
Remark	Regarding to output frequency Pin 1, Pin 2 is irrespective of any frequency	pin 1; $F_o/2^n$ pin 8: F_o	

*Inclusive of calibration tolerance at 25°C, operating temperature, input voltage change, load change, aging, shock and vibration.


GENERAL SPECIFICATIONS




OUTLINE AND DIMENSIONS (MM)

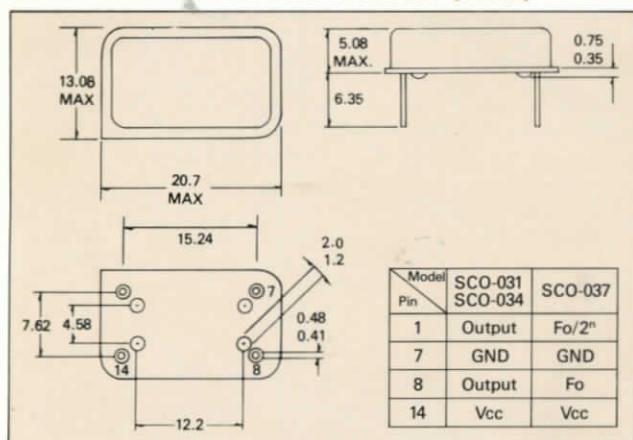


TEST CIRCUITS

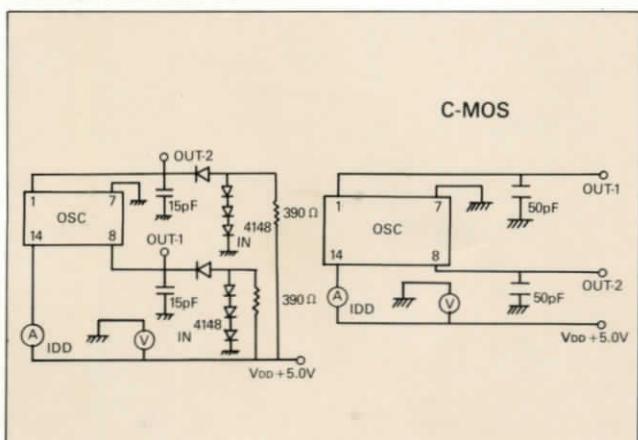

OUTPUT WAVEFORM

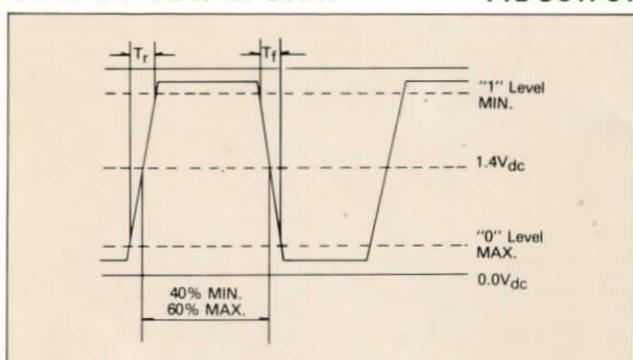

TTL OUTPUT

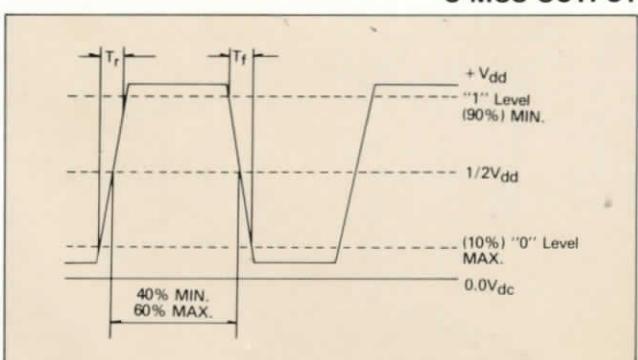

C-MOS OUTPUT

CRYSTAL OSCILLATORS


Features

- Compatible with 8-pin dual in line
- Drives C-MOS and TTL IC without analog design
- Low power consumption
- Cost and space savings
- Hermetically sealed metal case and high reliability


Model	SCO-061	SCO-062	SCO-063	
Frequency range	3.5~75 MHz	0.256~20 MHz	0.256~60 MHz	
Frequency stability*		$\pm 25 \pm 1000$ ppm		
Operating temperature range		0°C~70°C		
Storage temperature range		-55°C~125°C		
Input voltage		5.0V DC $\pm 10\%$		
Input current	40mA Max. (3.5~25 MHz) 70mA Max. (25~75 MHz)	25mA Max	15mA Max. (0.256~25 MHz) 30mA Max. (25~60 MHz)	
Output	Symmetry Rise/Fall time Fanout	50% $\pm 10\%$ (at 1.4V) 10ns Max. (3.5~25 MHz) 5ns Max. (25~75 MHz)	50% $\pm 10\%$ (at $1/2 V_{DD}$) 15ns Max.	50% $\pm 10\%$ (at 1.4V) 10ns Max. (0.256~25 MHz) 5ns Max. (25~60 MHz)
Remark	TTL	C-MOS	TTL AND C-MOS Compatibles	

*Inclusive of calibration tolerance at 25°C, operating temperature, input voltage change, load change, aging, shock and vibration.


OUTLINE AND DIMENSIONS (MM)

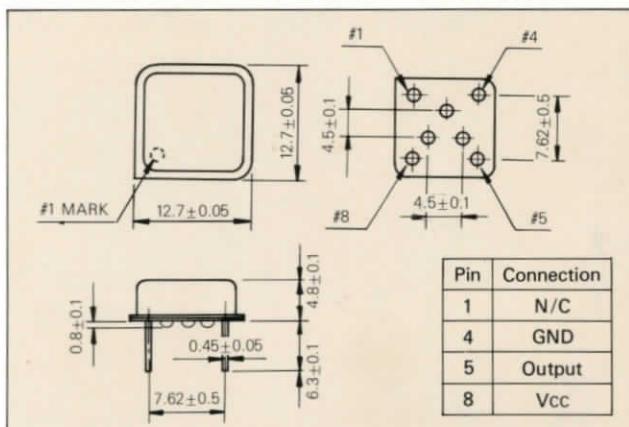


TEST CIRCUITS

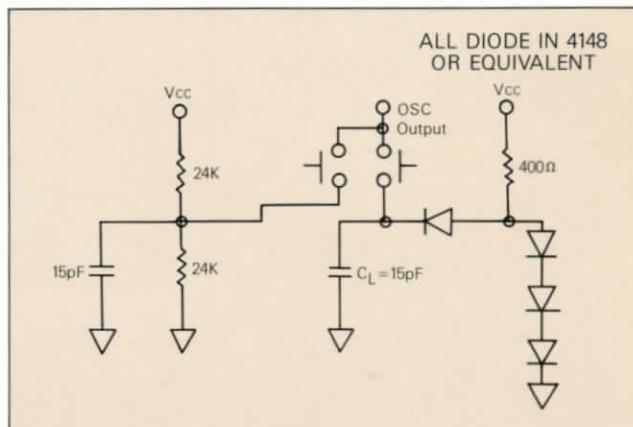

OUTPUT WAVE FORM

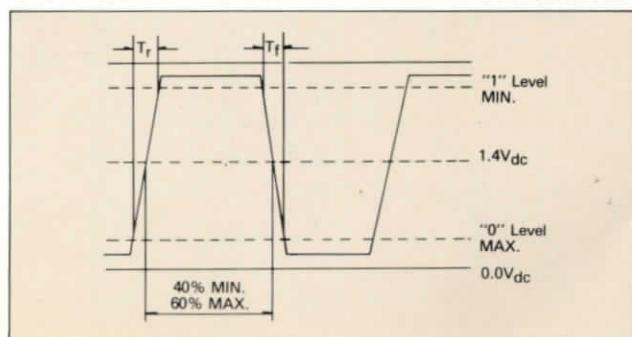

TTL OUTPUT

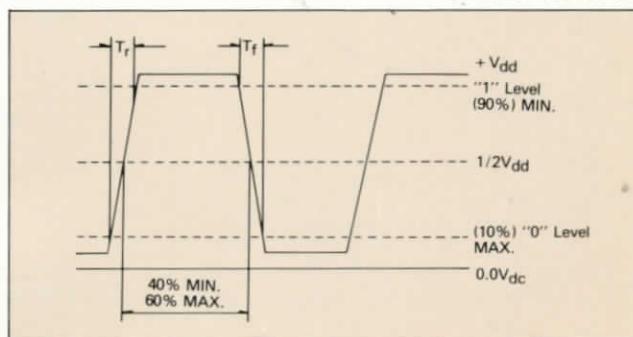

C-MOS OUTPUT

SCO-060 Series

GENERAL SPECIFICATIONS

