


RT625



RT625

AMA







Specification

Rated load	Current / Voltage	A/VAC	10/300
Dielectric strength	Between coil and contact	V/S	4000
	Between contacts	V/S	2500
External connection wire	AWG/mm <sup>2</sup>	20-14/0.5-2.5	
Screw torque	Nm	0.8	
Terminal protection degree		IP20	


Matched relay

Socket	Relay model	Metal Clip	Module	DIN rail
RT625	JQX-14FC/14FF 2Z	B-25C K-25C	AMA Series	
	JQX-14FL 2Z	B-20L K-20L		
	JQX-14FL 1Z 16A			
	JQX-115F 2Z	B-15F K-15F		
	JQX-115F 1Z 16A			

Outline dimension, Wiring diagram

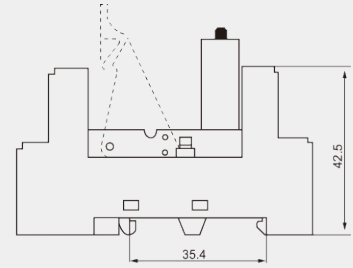


RT625-B



RT625-B

AMB



Specification

Rated load	Current / Voltage	A/VAC	10/300
Dielectric strength	Between coil and contact	V/S	4000
	Between contacts	V/S	2500
External connection wire	AWG/mm <sup>2</sup>	20-14/0.5-2.5	
Screw torque	Nm	0.8	
Terminal protection degree		IP20	

Matched relay

Socket	Relay model	Metal Clip	Module	DIN rail
RT625-B	JQX-14FC/14FF 2Z	B-25C K-25C	AMB Series	
	JQX-14FL 2Z	B-20L K-20L		
	JQX-14FL 1Z 16A			
	JQX-115F 2Z	B-15F K-15F		
	JQX-115F 1Z 16A			

Outline dimension, Wiring diagram

