


Features

- 12A carrying current
- 1H and 1Z contact form available
- construction
- Standard PC layout



JQC-3F (T73)

PCB Relay

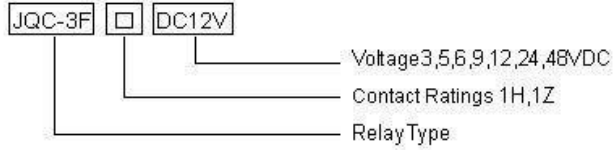

Contact Ratings

Contact Ratings	1H 1Z
Contact Resistance	100m (at 1A 6VDC)
Contact Material	Silver Alloy
Contact capacity	10A 250VAC, 7A 250VDC

Specification

Insulation Resistance	100M 500VDC
Dielectric Strength	BCC 1500V 1 min
	BOC 750V 1 min
Operate Time	10ms/5ms
Terminal Type	PCB


Coil Ratings

Nominal Coil Power	0.36W, 0.45W
--------------------	--------------

Coil Versions

Nominal Voltage VDC	Coil Resistance at 20°C±10%		Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicable Voltage (VDC)
	0.36W	0.45W			
3	25	20	2.25	0.3	3.9
5	70	55	3.75	0.5	6.5
6	100	80	4.50	0.6	7.8
9	225	180	6.75	0.9	11.7
12	400	320	9.00	1.2	15.6
24	1600	1280	18.00	2.4	31.2
48	6400	5100	36.00	4.8	62.4

Dimension Bottom View

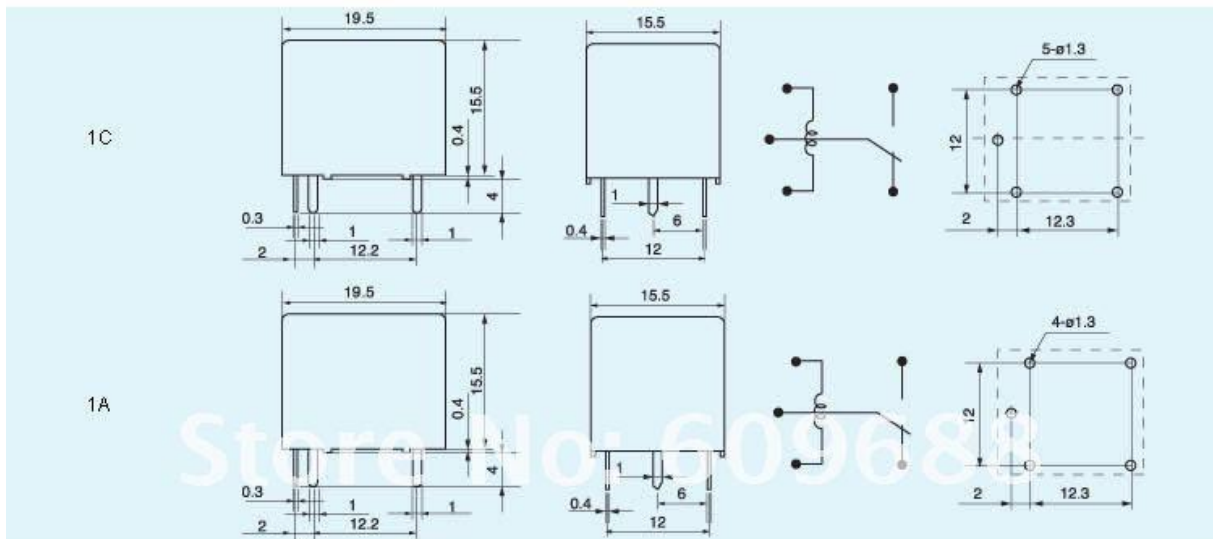

Reference Data

