

津綻石英科技股份有限公司  
JENJAAN QUARTEK CORPORATION.  
TEL: 886-2-8221-4498 FAX: 886-2-8221-4499  
E-mail: [jenjaan@jenjaan.com.tw](mailto:jenjaan@jenjaan.com.tw) <http://www.jenjaan.com.tw>

東莞創群石英晶體有限公司  
DONG GUAN ALLIED PROJECT LIMITED.  
TEL: 86-769-83119395 FAX: 86-769-83116467  
E-mail: [alliedj@pub.dgnet.gd.cn](mailto:alliedj@pub.dgnet.gd.cn)

## CERAMIC RESONATOR SPECIFICATION

### 1.SCOPE

This specification shall cover the characteristics of the ceramic resonator with        MHz for the clock oscillation of microprocessor etc.

2.PART NUMBER : NRTS4.00 -DZ2

3.SPECIFICATION NO : 4.000 MHz

### 4.ELECTRICAL SPECIFICATION

No	Item	Requirements
4.1	Oscillation Frequency (Fosc)	4.000MHz $\pm$ 0.5%
4.2	Resonant Impedance (Ro)	33 $\Omega$ / Max
4.3	Temperature Coefficient of Oscillation Frequency	$\pm$ 0.3% max ( -20 $^{\circ}$ C to +80 $^{\circ}$ C )
4.4	Withstanding Voltage	100 VDC 5 sec.max
4.5	Rating Voltage (1) D.C. Voltage (2) A.C. Voltage	6 V.D.C. 15 Vpp.
4.6	Insulation Resistance	100M $\Omega$ min. (at 10 VDC)
4.7	Operating Temperature	-20 $^{\circ}$ C to +80 $^{\circ}$ C
4.8	Storage Temperature	-30 $^{\circ}$ C to +85 $^{\circ}$ C
4.9	Aging Rate (Fosc)	$\pm$ 0.3% max ( 10 year )

### 5.MEASUREMENT


#### 5.1 Measurement Condition

The reference temperature shall be 25 $^{\circ}$ C $\pm$ 2 $^{\circ}$ C. The measurement shall be performed at the temperature range of 5 $^{\circ}$ C to 35 $^{\circ}$ C unless otherwise the result is doubtful.


#### 5.2 Measurement Circuit and Equipment

Oscillating frequency shall be measured by the standard test Circuit.  
Resonant impedance shall be measured by HP8751A Network Analyzer.

### 5.2 TEST CIRCUIT

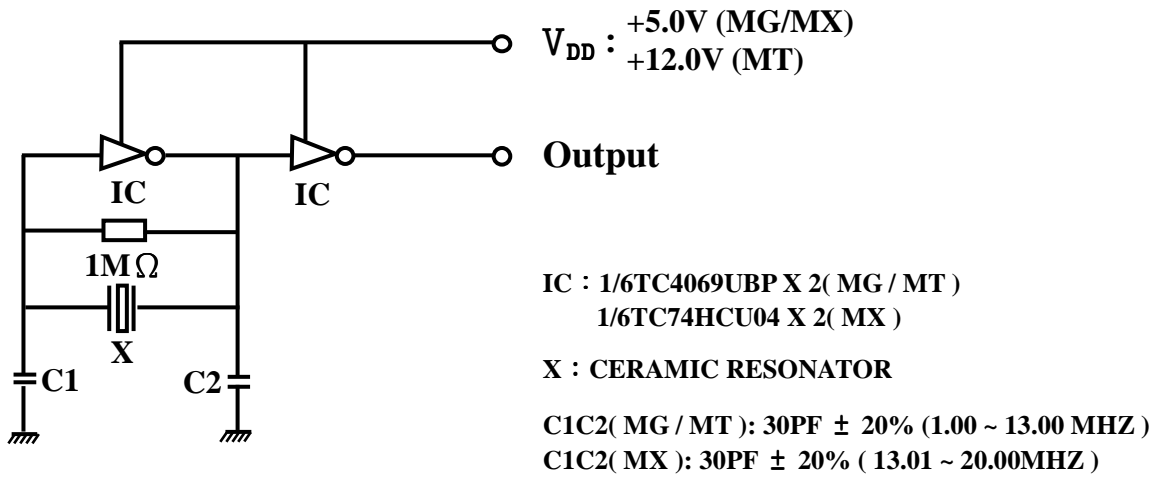

### 6.0 DIMENTIONS

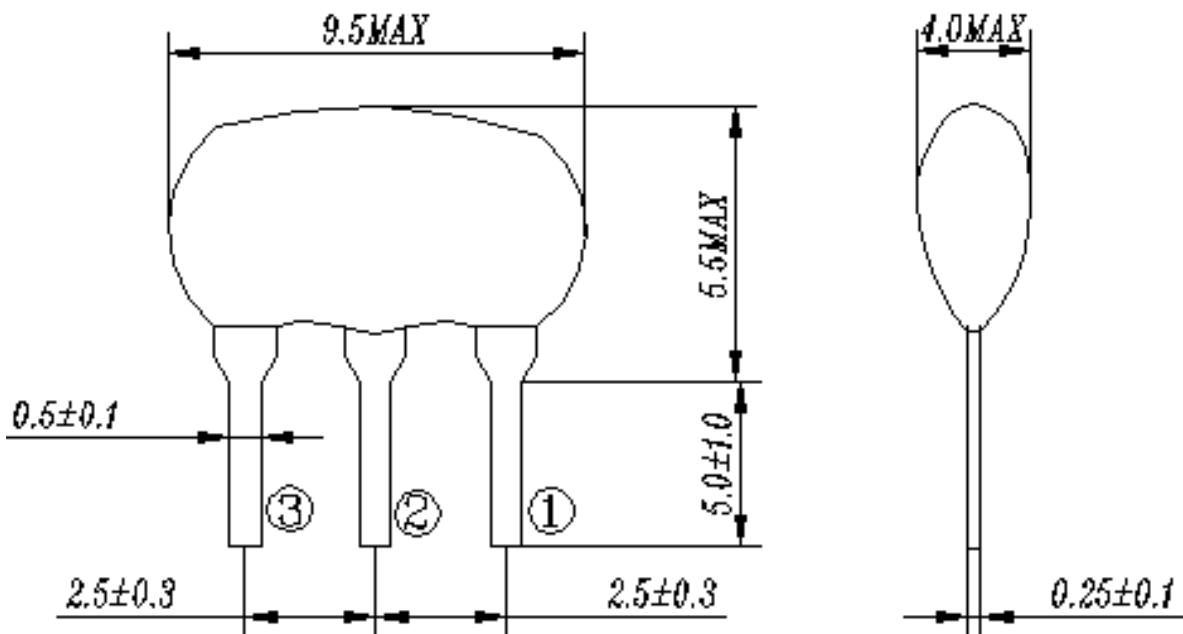

津綻石英科技股份有限公司  
**JENJAAN QUARTEK CORPORATION.**  
 TEL: 886-2-8221-4498 FAX: 886-2-8221-4499  
 E-mail: [jenjaan@jenjaan.com.tw](mailto:jenjaan@jenjaan.com.tw) <http://www.jenjaan.com.tw>

東莞創群石英晶體有限公司  
**DONG GUAN ALLIED PROJECT LIMITED.**  
 TEL: 86-769-83119395 FAX: 86-769-83116467  
 E-mail: [alliedj@pub.dgnet.gd.cn](mailto:alliedj@pub.dgnet.gd.cn)

## 7. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS

No	Item	Condition of test	Performance Requirements
7.1	Humidity	Keep the resonator at $40 \pm 2^{\circ}\text{C}$ and 90-95%RH for 96 $\pm 4$ hours. Then release the resonator into the room condition for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.
7.2	Vibration	Subject the resonator to vibration for 2 hours each in x, y and z axis with the amplitude of 1.5mm, the frequency shall be varied uniformly between the limits of 10-55Hz	It shall fulfill the specifications in Table 1.
7.3	Mechanical Shock	Drop the resonator randomly onto a concrete floor from the height of 100 cm 3 times.	It shall fulfill the specifications in Table 1.
7.4	Resistance to Solder Heat	Dip the resonator terminals no closer than 2 mm into the solder bath $235 \pm 5^{\circ}\text{C}$ for 5sec.	It shall fulfill the specifications in Table 1.
7.5	Solderability	Dip the resonator terminals no closer than 2 mm into the solder bath at $235 \pm 5^{\circ}\text{C}$ for $3 \pm 0.5$ sec.	More than 95% of the terminal surface of the resonator shall be covered with fresh solder.
7.6	High Temperature Exposure	Subject the resonator to $80 \pm 5^{\circ}\text{C}$ for $96 \pm 4$ hours. Then release the resonator into the room conditions for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.
7.7	Low Temperature	Subject the resonator to $-20 \pm 5^{\circ}\text{C}$ for $96 \pm 4$ hours. Then release the resonator into the room conditions for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.
7.8	Temperature Cycling	Subject the resonator to $-20^{\circ}\text{C}$ for 30 min. followed by a high temperature of $80^{\circ}\text{C}$ for 30 min. Cycling shall be repeated 5 times with a transfer time of 15minutes. at the room condition. Then release the resonator into the room temperature for 1 hour prior to the measurement.	It shall fulfill the specifications in Table 1.

**津綻石英科技股份有限公司**  
**JENJAAN QUARTEK CORPORATION.**  
 TEL: 886-2-8221-4498 FAX: 886-2-8221-4499  
 E-mail: [jenjaan@jenjaan.com.tw](mailto:jenjaan@jenjaan.com.tw) <http://www.jenjaan.com.tw>

**東莞創群石英晶體有限公司**  
**DONG GUAN ALLIED PROJECT LIMITED.**  
 TEL: 86-769-83119395 FAX: 86-769-83116467  
 E-mail: [alliedj@pub.dgnet.gd.cn](mailto:alliedj@pub.dgnet.gd.cn)

**7. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS**  
**(Continued from the preceding page)**

No	Item	Condition of Test	Performance Requirements
7.9	Lead Fatigue (1) Pull Test	Weight along with the direction of terminals without any shock 0.5kg for 10±1sec.	The resonator shall show no evidence of damage and shall fulfill all the initial electric characteristics.
	(2) Bending Test	Lead shall be subject to withstand Against 90 degree bending at its stem. This operation shall be done towards both directions.	

**TABLE1**

Item	Specification
Oscillation Frequency Change	$\Delta F/F_{osc} \leq 0.5\% \text{ max}$
Resonant Impedance	$\Delta R_o \leq \Omega$


**津錠石英科技股份有限公司**  
**JENJAAN QUARTEK CORPORATION.**  
 TEL: 886-2-8221-4498 FAX: 886-2-8221-4499  
 E-mail: [jenjaan@jenjaan.com.tw](mailto:jenjaan@jenjaan.com.tw) <http://www.jenjaan.com.tw>

**東莞創群石英晶體有限公司**  
**DONG GUAN ALLIED PROJECT LIMITED.**  
 TEL: 86-769-83119395 FAX: 86-769-83116467  
 E-mail: [alliedj@pub.dgnet.gd.cn](mailto:alliedj@pub.dgnet.gd.cn)


## CRYSTAL UNIT

### \*\*PACKING INFORMATION FOR CERAMIC TYPE(NRA)\*\*

#### ■ STEP 1: PACK THE CERAMIC FILTER WITH PLASTIC BAG (500 PCS/BAG)

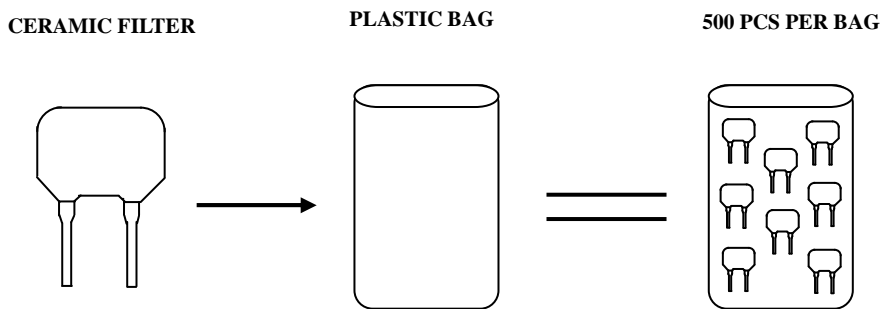

#### ■ STEP 2: WRAP WITH THE BUBBLE WRAP AND PUT IN TO THE INNER BOX FOR 5000PCS

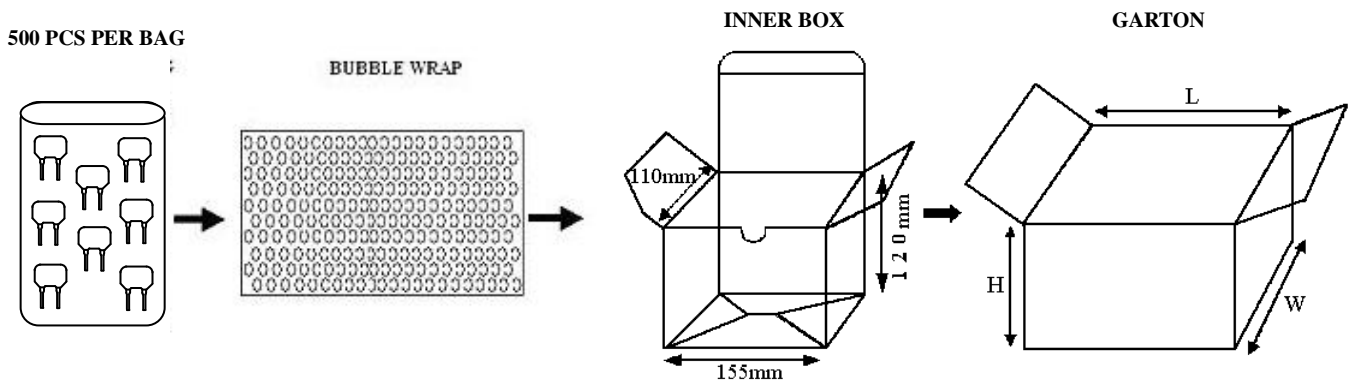


#### ■ STEP 3: STICK THE STICKERS ON THE INNER BOX AND CARTON

##### INNER BOX STICKER



##### CARTON STICKER

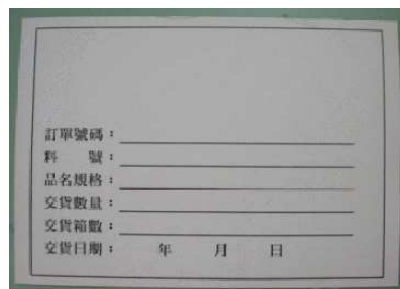

##### CARTON DIMENSION DETAILS

CARTON SIZE NO.	DIMENSIONS IN mm			Q'TY	Max
	L	W	H	PCS/CARTON	
4	403	285	276	50K	
5	402	285	155	25K	
6	292	200	155	10K	