嘉尼企業股份有限公司 CANAL ELECTRONIC CO.,LTD.

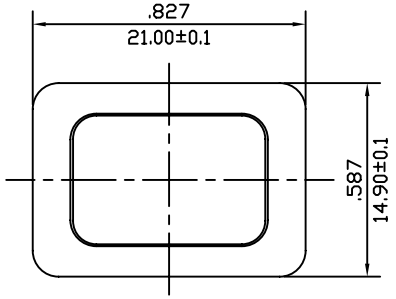

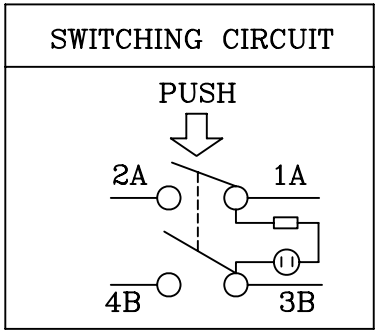

SWITCHING CIRCUIT

SPECIFICATION MODEL :"PS-5" SERIES

RATING:16A 125VAC, (UL,CSA)
16A 250VAC, (UL,CSA)
16A(4) 250VAC ~T125/55
(VDE,SEMKO, DEMKO,NEMKO,FIMKO,SEV)

CONTACT RESISTANCE:20mΩ (MAX),
INSULATION RESISTANCE:500VDC – 100MΩ (MIN).
WITHSTAND VOLTAGE:1,000VAC 1 MINUTE.
ILLUMINATED: 200~250VAC
OPERATION: 500±200 GRAM.

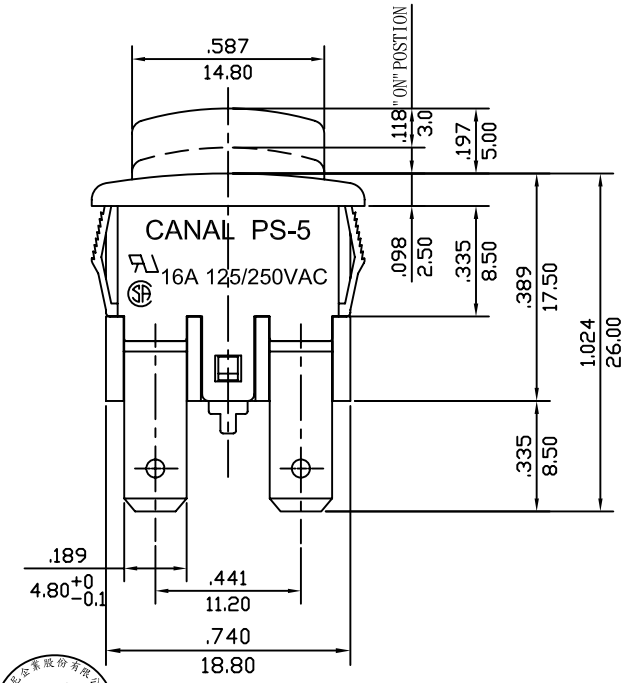

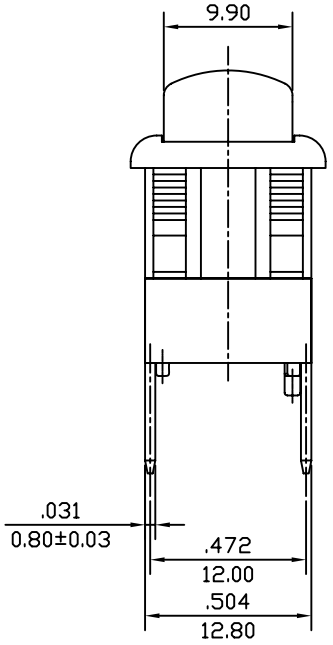



X=Panel thickness	Dim.Y	Dim.Z
0.75~1.25mm	$19.2\pm^{0}_{0.1}$ mm	$12.9\pm^{0.15}_{0}$mm
1.25~2mm	$19.4\pm^{0}_{0.1}$ mm	$12.9\pm^{0.15}_{0}$mm
2~3mm	$19.8\pm^{0}_{0.1}$ mm	$12.9\pm^{0.15}_{0}$mm

嘉尼企業股份有限公司 工程部 2007.03.08 文件管制章

NOTE:1. TOLERANCES UNLESS OTHERWISE SPECIFIED:$\pm\frac{.012}{0.3}$ (in/mm)
2. IT IS IN COMPLIANCE WITH CANAL ROHS SPECIFIATION:WI-QA-24

REVISION	DESCRIPION	REVISED BY
△		
△		
△		
⚠2007.03.08	首次出圖.	劉義正

TOLEANCES .x .xx ANGLE ½°				UNIT	mm	PART NAME	PS-5 SPEC DRAWING	DWG NO
DRAWN BY	劉義正	DESIGNED BY	劉義正	SCALE	5/3			S1587A
CHECKED BY		APPROVED BY		DATE	2007.03.08	PART NO	PS5-210-PG**-S	