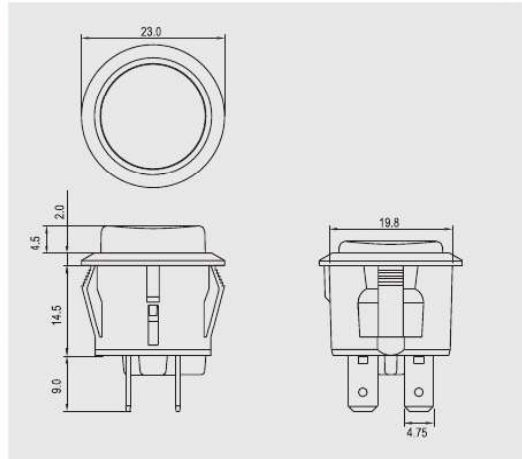


R13-527



Rating
10A 125V/6A 250V AC
1/2HP 125V-250V AC

Contact resistance

50mΩ Max


Insulation resistance

DC 500V 100MΩ Min

Dielectric strength

AC 1000V 1 minute

Cut-out




0.7~3.0 mm max

FEATURES


- * MATERIAL: Frame is nylon (UL flame:94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber, green, blue and white colors.
- * Snap-in mounting, easy to install switch into panel.
- * Watertight and dustproof to fit IP65.

Cut-out for X2 BUTTON



0.7~2.5 mm max





















BUTTON



THE SPECIFICATIONS & APPROVALS SUBJECT TO CHANGE WITHOUT NOTICE.

Ordering number instruction

R13-527 -

FUNCTION				TERMINAL
Non-illuminated button (不帶燈)				0 2 .187" SQ
B		D		
Illuminated / Different button (帶燈/按鈕不同)				
B L		B 5 L		
				125VAC 33KΩ / 250VAC 150KΩ
D 5 B		D B		
				125VAC 33KΩ / 250VAC 150KΩ
Momentary / Non-illuminated button (彈回/不帶燈)				
A		C		
Momentary / Non-illuminated / Different button (彈回/不帶燈 / 按鈕不同)				
A L		A 5 L		
				125VAC 33KΩ / 250VAC 150KΩ
C B		C 5 B		
				125VAC 33KΩ / 250VAC 150KΩ
Independent circuit (獨立迴路)				
C L		C 5 L		
				125VAC 33KΩ / 250VAC 150KΩ
D L		D 5 L		
				125VAC 33KΩ / 250VAC 150KΩ
Watertight (防水)				
A 2		A 2 L		
				125VAC 33KΩ / 250VAC 150KΩ
B 2		B 2 L		
				125VAC 33KΩ / 250VAC 150KΩ
C 2		C 2 B		
				125VAC 33KΩ / 250VAC 150KΩ
D 2		D 2 L		
				125VAC 33KΩ / 250VAC 150KΩ
D 2 B		D 2 L		
				125VAC 33KΩ / 250VAC 150KΩ

THE DRAWING IS FOR REFERENCE ONLY.