* The specification subject to change without notice." "The drawing is for reference only.

R13-285

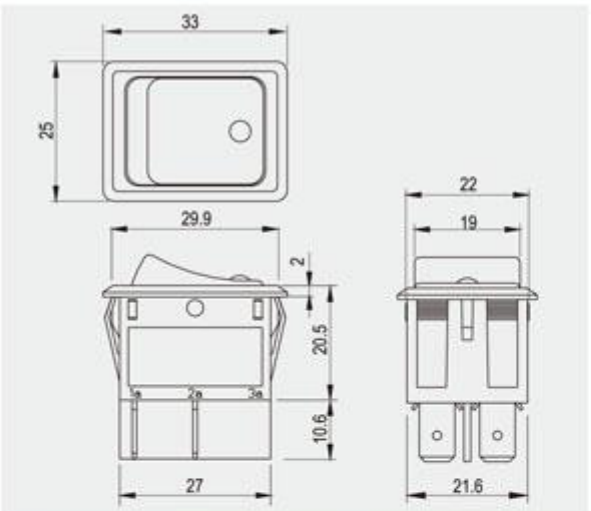

Rating
10(8)A 250V AC 10A 60V DC
Contact resis
50mΩ Max
Insulation res
DC 500V 100
Dielectric str
AC 1500V 1 m
Cut-out

X	
0.75~1.25	30.2
1.25~2	30.4
2~4	30.8

Cut-out for X

X	
0.75~1.25	30.2
1.25~2	30.4
2~4	30.8

FEATURES

* MATERIAL: Frame is nylon (UL flame: 94V-2). Terminals are silver plated brass.
* Illuminated actuators are molded in PC, available with red, amber, green, blue and white colors.
* Snap-in mounting, easy to install switch into panel.
* Red lighted when OFF, green lighted when ON.
* Waterproof by a rubber cover: R13-285A8, R13-285A8L and R13-285C8L.
* New design AC LED.

Ordering number instruction

R13-285 ☐☐☐☐ - ☐☐ - ☐☐☐☐ -

FUNCTION

Illuminated / Different position（帶燈/動作特性不同）

A L



C L



Waterproof（防水）

A 8



A 8 L



C 8



C 8 L



ROCKER

AL,CL

1 FLAT TYPE

A8,C8,A8L,C8L

2 ARC TYPE



A8,C8,A8L,C8L

TERMINAL

0 1 .250" SQ

FRAME COLOR
ROCKER COLOR
LED COLOR(ON)
LED COLOR(OFF)

COLOR

A AMBER
B BLACK
G GREEN
U BLUE
C CLEAR
R RED
W WHITE
N NONE

VOLTAGE

4 125VAC(110VAC)
5 250VAC(220VAC)