

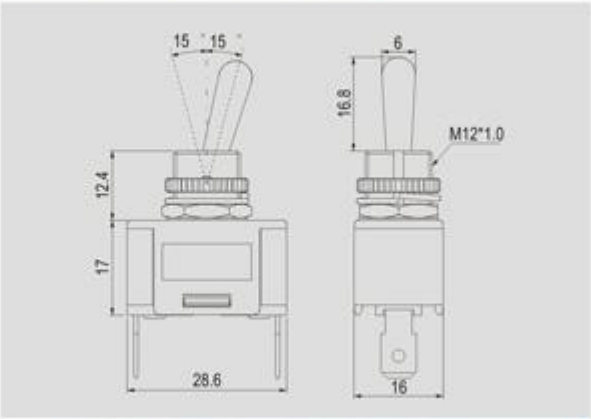


R13-416

Plastic Housing



Rating
10A 125V AC 6A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out



FEATURES

- * MATERIAL: Metal toggle are nickel plated brass. Frames and bushing are nylon (UL flame: 94V-2).
- Terminals are nickel plated brass.
- * Phenolic base.
- * Indicator plate and waterproof boot are optional.



R13-416

FUNCTION		LEVER	TERMINAL
A  2P SPST	1 Metal Lever	6 Plastic Lever	0 1 .250" SQ
			0 5 SO
C  3P SPDT	2 Plastic Lever	7 Plastic Lever	0 6 SC 3
D  3P SPDT			0 7 SC 4

