



TACT Switch™

Sharp Feeling


Soft Feeling

Snap-in Type

Surface Mount Type

Radial Type

Typical Specifications

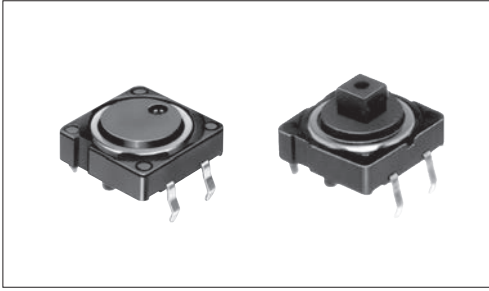

Items	Specifications
Rating (max.)	50mA 12V DC
Rating (min.)	10μA 1V DC
Initial contact resistance	100mΩ max.
Travel (mm)	0.3

Product Line

Product No.	Operating force	Operating direction	Operating life (5mA 5V DC)	Stem color	Stem	Minimum order unit (pcs.)		Drawing No.
						Japan	Export	
SKHCBJA010	0.74N	Top push	500,000 cycles	Blue	Joint stem	1,000	1,000	1
SKHCBEA010	1.27N		1,000,000 cycles	Black				
SKHCBGA010	2.55N		500,000 cycles	Dark gray				
SKHCBKA010	0.74N		500,000 cycles	Blue	Flat stem			2
SKHCBFA010	1.27N		1,000,000 cycles	Black				
SKHCBHA010	2.55N		500,000 cycles	Dark gray				

Packing Specifications

Bulk

Number of packages (pcs.)		Export package measurements (mm)
1 case / Japan	1 case / export packing	
5,000	15,000	309×476×347

Dimensions

Unit:mm

No.	Photo	Style	PC board mounting hole dimensions (Viewed from switch mounting face)
1			

Refer to P.259 for soldering conditions.