

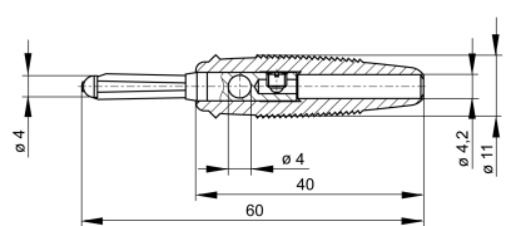


datasheet for BUELA 20 K
 article number: 930726100



| | |
|--|---|
| product description: | order number: 930 726-100 |
| description: | Multiple-spring wire plug, shatter-proof, flexible insulated sleeve with transverse hole. The tapering sleeve end also serves as kinking protection for the lead. Screw connection up to maximum cable cross-section of 1.5 mm ² . Nickel-plated brass contact material. |
| typ: | BUELA 20 K schwarz/black |
| system: | 4mm system |
| order number: | 930 726-100 |
| color |  |
| other color versions: |  |
| technical data | |
| measurement category acc. to IEC 61010: | CAT I |
| pin dimensions | 4 mm |
| type of contact: | pin (spring loaded) |
| type of termination: | screw |
| rated voltage: | 30 VAC / 60 VDC |
| rated current: Please consider derating curve! | 16 A |
| contact resistance: | 3 mOhm |
| material | |
| contact material: | brass |
| contact surface material: | nickel |
| housing material: | PVC - P |
| environmental conditions: | |
| temperature range: | -25 °C to +70 °C |
| drawing | |
| |  |