

PRODUCT PHOTOGRAPH





PRODUCT SIZE



PRODUCT DISPLAY



Display bit: 3 1/2 bits

Accuracy: + 0.5%

Input impedance: 10M


Maximum display: 1999

Power supply: 9V (6f22)

Mode of operation: manual range

PRODUCT PACKAGING

WEIGHT:330G

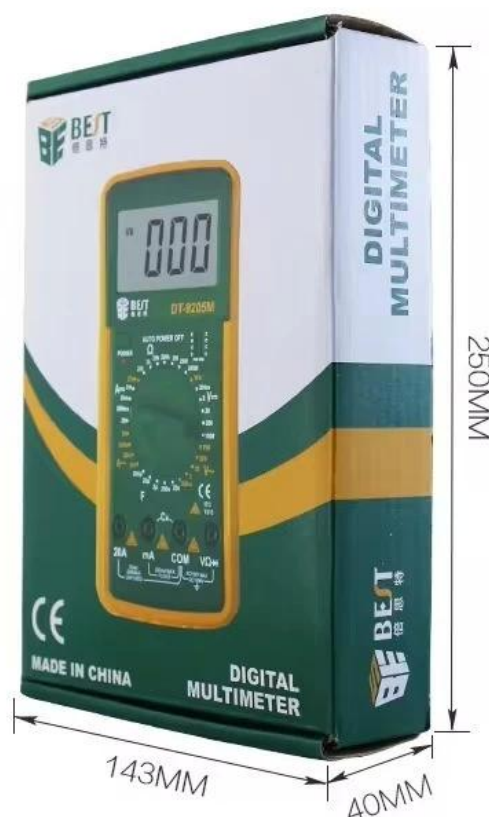

PARTS

PACKING

Product parmater

Basic function	Range.	Accuracy
DC voltage	200mV/2V/20V/200V/1000V	$\pm(0.5\%+3)$
AC voltage	200mV/2V/20V/200V/700V	$\pm(0.8\%+5)$
DC current	2mA/20mA/200mA/20A	$\pm(0.8\%+10)$
AC current	2mA/20mA/200mA/20A	$\pm(2.0\%+5)$
Resistance	200 Ω /2k Ω /20k Ω /200k Ω /2M Ω /20M Ω /200M Ω	$\pm(0.8\%+3)$
Capacitance	200uF/20uF/2uF/200nF/20nF	$\pm(2.5\%+20)$
Special Features	9205M	
Diode, audion test	√	
Break line alarm	√	
Low voltage display	√	
Automatic shutdown	√(can be set manually)	
Function protection	√	
200mA file fuse	√	

20A file fuse	√
Shock protection	√
Input impedance	10MΩ
Operation	Manual Range
Maximum Display	1999
LCD	59×31mm
Power	9V (6F22)