


High Speed Data Path (TX for USB, or for DP Alt Mode)

USB 2.0 Interface

High Speed Data Path (RX for USB, or TX for DP Alt Mode)

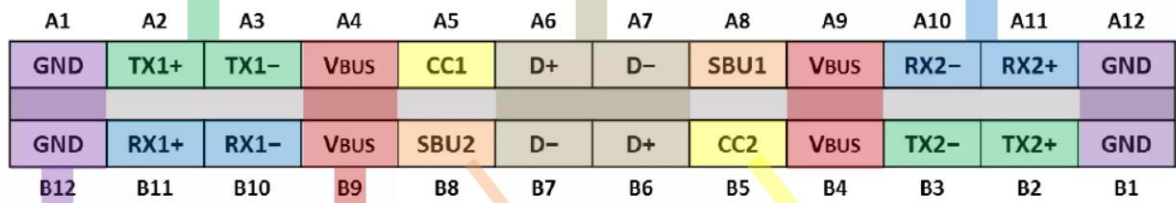

Cable Ground

Cable Bus Power

For Sideband Use (not used for USB)

Plug Configuration Detection

- One becomes V_{CONN}, for cable or adaptor power
- CC is used for USB-PD communication