

圖號. DRAWING. NO :

品名 NAME : NYLON INSULATED CORD-END TERMINALS

版次 EDITION

NO:

記述 DESCRIPTION

日期 DATE



核可 CHECKED

WIRE RANGE mm²	產品編號 ITEM NO.	MOQ REQUIRED	F	L	C	W	t	COLOR 顏色		
								FRENCH	GERMAN	DIN
26AWG 0.14mm²	TUL-RI-00106		6.00±0.40	10.50±1.50	0.80±0.14	1.90±0.20	0.15±0.05	BROWN	GREY	GREY
			8.00±0.40	12.50±1.50				咖啡色	灰色	灰色
24AWG 0.25mm²			6.00±0.40	10.50±1.50	0.80±0.14	1.90±0.20	0.15±0.05	VIOLET	LIGHT BLUE	YELLOW
			8.00±0.40	12.50±1.50				紫色	淺藍色	黃色
22AWG 0.34mm²			6.00±0.40	10.50±1.50	0.80±0.14	1.90±0.20	0.15±0.05	PINK	TURQUOISE	TURQUOISE
			8.00±0.40	12.50±1.50						
			10.00±0.40	14.50±1.50						
			12.00±0.40	16.50±1.50						
20AWG 0.5mm²			5.00±0.40	11.00±1.50	1.00 ^{+0.14} _{-0.00}	2.60±0.20	0.15±0.05	WHITE	ORANGE	WHITE
			6.00±0.40	12.00±1.50						
			8.00±0.40	14.00±1.50						
			10.00±0.40	16.00±1.50						
18AWG 0.75mm²			6.00±0.40	12.00±1.50	1.20 ^{+0.14} _{-0.00}	2.80±0.20	0.15±0.05	SKY BLUE	WHITE	GREY
			☆ 6.00±0.40	12.00±1.50		3.00±0.20				
			8.00±0.40	14.00±1.50		2.80±0.20				
			☆ 8.00±0.40	14.00±1.50		3.00±0.20				
			10.00±0.40	16.00±1.50		2.80±0.20				
			☆ 10.00±0.40	16.00±1.50		3.00±0.20				
			12.00±0.60	18.00±1.50		2.80±0.20				
			☆ 12.00±0.60	18.00±1.50		3.00±0.20				
			18.00±0.60	24.00±1.50		2.80±0.20				
			☆ 18.00±0.60	24.00±1.50		3.00±0.20				

NOTE:

1. TEMPERATURE RANGE : -40 °C UP TO + 105 °C
2. MAXIMUM ELECTRICAL RATING:600 VOLTS
3. TERMINAL MATERIAL : COPPER TUBE
4. PLATING : ELECTRO TIN PLATED
5. INSULATION MATERIAL : NYLON

2022.04.12

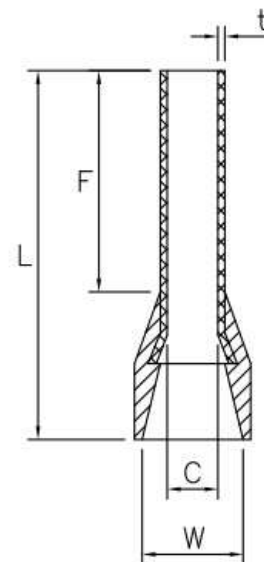

認可 APPROVALS

製圖 DRAFT:


TINA

設計 DESING:

KEN

核可 CHECKED:

KEN

第三視角
THIRD VIEW

MATERIAL

INSULATION: NYLON

MATERIAL: COPPER TUBE

TIN PLATING

單位 UNIT

m/m

比例 SCALE

1 : 1

日期 DATE : 2022. 04. 12